




USB 2 to Industrial 4-Port RS232-422-485 Serial TB Adapter

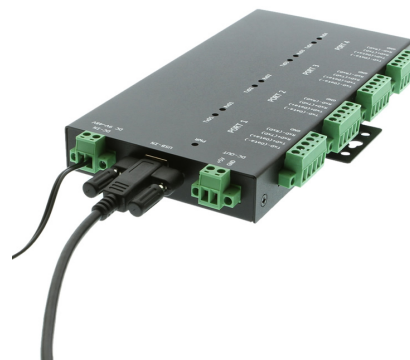

Terminal block serial adapter for RS-232/422/485

Model No. USB2-4COMi-TB



Our series of Industrial USB 2.0 to terminal block serial adapters support RS-232, RS-422, and RS485 and are designed with the user in mind, the adapter is with DIP switch control for each individual port connection to suit your applications.

- Supports 15KV ESD protection and 600W surge protection for all serial signals
- Uses FTDI FT4232H USB 2.0 to quad UART chip
- Incorporates DIP switch control over each individual port.
- Supports RS-232, RS-422, and RS-485 signals.

Interested? LEARN MORE →



[View more images here >](#)

Questions? Speak to an engineering expert today!

Our on site engineers are ready to help you with your build.

☎ **1-727-209-1300** (Local) ✉ **expert@coolgear.com**



We Speak Your Speak - When you reach out to our support, you'll find yourself in the hands of a solution-oriented, knowledgeable expert ready to answer whatever question you throw at them. Go ahead, test us.

We're Ready For Integration, Every Time. - Coolgear streamlines the task of selecting charging and connectivity products. For over 20 years our rugged, off-the-shelf USB hubs and serial products are ready to go for your next project.

Within every great machine, lives Coolgear. - At Coolgear, we're just as passionate about building great products as you are. That's why we aim to meet or exceed your build specs every time.,

Advanced Engineering - Coolgear painstakingly sources high-quality components, oversees all manufacturing methods, and conducts rigorous testing to ensure all our products are industrial-grade. This means greater duty cycle, zero data loss, and longer lasting builds. We promise.,

PRODUCT SPECIFICATIONS

Looking for product documentation?
[View CAD Models, Data sheet and Drawings here >](#)



Power	Input Voltage	+9~28V DC
Compliance	Country of Origin	Taiwan
	Certifications	CE , FCC , RoHS , TAA
Physical Characteristics	Color	Black
	Mounting Style	Din-Rail
	Ports	1 USB Port
	Serial Standards	RS232, RS422, RS485
Serial Attributes	Baud Rate	921.6K bps
	FIFO Receive	2,000 bytes
	FIFO Transmit	2,000 bytes
Software	OS Support	Win Vista, Win 7, Win 8, Win 8.1, Win 10
Environmental	Operating Temperature	0 to 60C
Hardware	Chipset	FTDI
	Upstream USB Ports	1 Type-B Female USB
	Connector	5-Pin Terminal Block
Other Data	USB Interface	USB 2.0
	Weight	1.981 lbs
	Dimensions	11.250 × 5.687 × 2.500 in

Ready to Buy? Let's get to work!

Purchase order lets set you up.

Online with Credit card Orders shipped same day!

*orders placed prior to 3:30pm EST

 **1-888-688-2188 (Toll free)**

 **sales@coolgear.com**