


WEIGHT	CUSTOMER NO:	REMARK
113g		

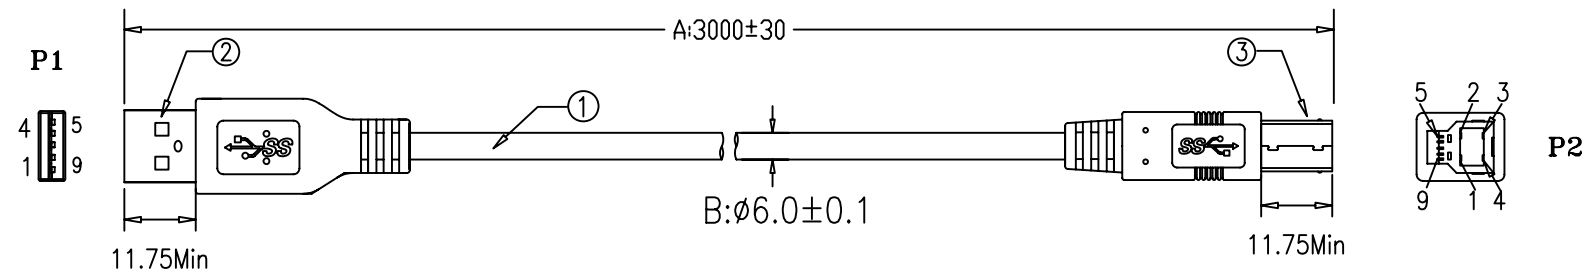

**PINOUT: P1**

1	_____	1 RED
2	_____	2 WHITE
3	_____	3 GREEN
4	_____	4 BLACK
5	_____	5 YELLOW
6	_____	6 BLUE
7	_____	7 DRAIN
8	_____	8 PURPLE
9	_____	9 ORANGE

**P2**

1	_____	1 RED
2	_____	2 WHITE
3	_____	3 GREEN
4	_____	4 BLACK
5	_____	5 YELLOW
6	_____	6 BLUE
7	_____	7 DRAIN
8	_____	8 PURPLE
9	_____	9 ORANGE

SHELL      BRAID      SHELL

**NOTES:**

- 1) PRIMARY DIM:A,B
- 2) RoHS Compliant.
- 3) DIE NO P1:OU04076. P2:OU04079
- 4) 100% SHORT CIRCUIT TEST(100%短斷路測試)
- 5) CONDUCTION RESISTANCE:5Ω(5M ABOVE 10Ω)  
導通阻抗:5Ω(5m以上10Ω)
- 6) INSULATION RESISTANCE:20MΩ(絕緣阻抗:20MΩ)
- 7) HI-POT:300V(高壓測試:300V)
- 8) SWAY TEST: PRODUCT LINE 1.5-2 SECONDS  
(SEMI-FINISHED PRODUCTS NOT REQUIRED)  
搖擺測試:成品線1.5-2秒(半成品不要求)

4	OUTER JACKET PVC 45Pa Black(1101) RoHS
3	USB3.0 B MALE BLUE SOLDER 三件式鍍銀RoHS
2	USB3.0 A/M 9P BLUE SOLDER TYPE TERMINAL PLATED GOLD RoHS
1	USB3.0(28#1P+D+A)*2+28#1P+24#2C+AB(64AM)+D OD:6.0MM Black(1101) 3000mm RoHS

A	FIRST EDITION	LCG	2013/11/26
REV.	ECR	DESCRIPTION	C.N. DATE
<small>THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF WIRETEK COMPUTER LIMITED AND SHALL NOT BE REPRODUCED COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF WIRETEK COMPUTER LIMITED.</small>			
<small>UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS ANGULAR TOLERANCE: ±1.0°</small>		<b>TITLE</b> <b>USB 3.0 CABLE</b>	
DIMENSIONS	TOLERANCE	CHKD.	CONF.
0.00 TO 30.00mm	±0.10mm		
30.01 TO 80.00mm	±0.13mm	DR.	APPD.
80.01 TO 150.00mm	±0.15mm	LCG	
150.01mm ↓	±0.20mm	PART NO.	51220018
MATERIAL		SCALE	/
FINISH		SHEET	1 / 1
		UNIT	MM
		SIZE	A4
		REV.	A