




WEIGHT	CUSTOMER NO:	REMARK
25g		

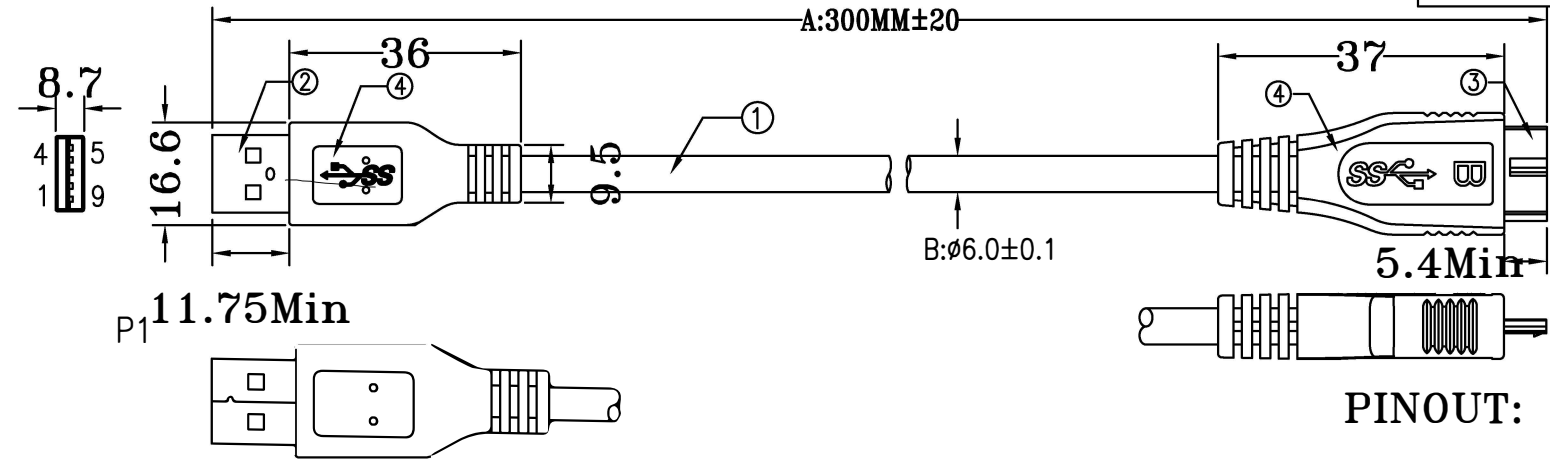

PINOUT: P1

P2

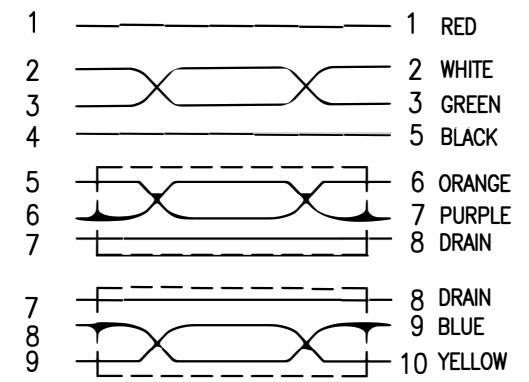

NOTES:

- 1) PRIMARY DIM: A B
- 2) RoHS Compliant.
- 3) DIE NO P1:OU04076. DIE NO P2:OU04082

4	OUTER JACKET PVC 45Pa Black RoHS
3	USB3.0 MICRO B/M 10P BLACK SOLDER TERMINAL PLATED GOLO 三件式(ROHS)
2	USB3.0 A/M 9P BLUE SOLDER TYPE TERMINAL PLATED GOLD ROHS
1	UL(28#1P+D+AM)2+28#1P+24#2C+A+B(112編) OD:6.0mm Black(1101) 300mm RoHS

A	FIRST EDITON	SAN	2015/05/11
REV.	ECR	DESCRIPTION	C.N. DATE
UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS ANGULAR TOLERANCE: ±1.0°		TITLE MICRO USB3.0 CABLE	
DIMENSIONS		CH ID.	CONF.
0.00 TO 30.00mm		±0.10mm	
30.01 TO 80.00mm		±0.13mm	
80.01 TO 150.00mm		±0.15mm	
150.01mm		±0.20mm	
MATERIAL		DR. SAN 2015/05/11	
FINISH		PART NO. 51220167	
		SCALE /	SHEET 1 / 1
		UNIT MM	SIZE A4
		REV. A	