
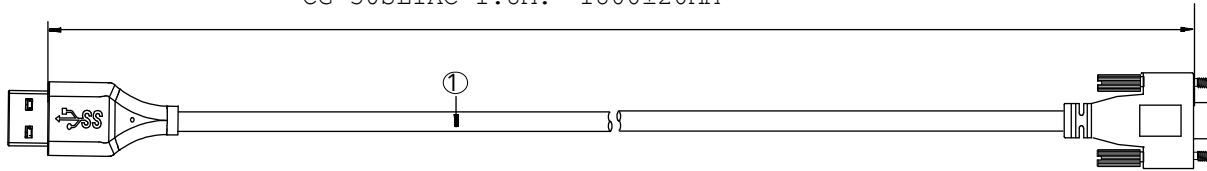


All materials compliant with RoHS, REACH and PrO65 standards


REV.	DATE	DESCRIPTION
A0	2021.04.17	ISSUE

CG-30SL1AC-05M: 500±20MM  
 CG-30SL1AC-1M: 1000±20MM  
 CG-30SL1AC-1.8M: 1800±20MM

**P1**  
 USB3.0 AM




**P2**  
 USB3.1 CM



**Electronic Tests:**

- A. Open/Short/Intermittence: 100%
- B. Hi-Pot: AC 300V 0.015 1mA
- C. Insulation Resistance: DC 300V 0.015 10MΩ Min
- D. Conductive Resistance: 3Ω Max

**PIN OUT**

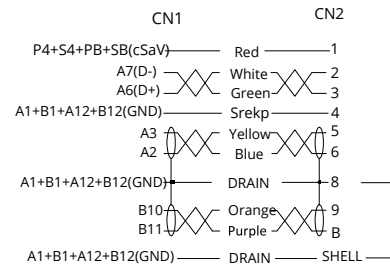

NO.	NAME	SPECIFICATIONS	Q'TY	UNIT
5	OUTER MOLDING	45P PVC, Black	10	G
4	INNER MOLDING	LDPE	10	G
3	CONNECTOR	USB3.0 A Male, Pin Gold Fish, Shell Nickel Plated	1	PCS
2	CONNECTOR	USB3.1 C Male, Pin Gold Fish, Shell Nickel Plated, with PCB	1	PCS
1	CABLE	USB3.1 [30AWG*1P+D+AL-MY]*2C+30AWG*1P+30AWG *1C+22AWG *2C+AL+B+PVC Jacket, OD:4.5± 0.2MM	AR	MM

	<b>MODEL #:</b>	CG-30SL1AC
	<b>PAGE:</b>	1 / 1
<b>DRAW:</b>		<b>NOTES:</b> USB Type-C to A Dual Screw Lock Cable 5GB Data 3A Power
<b>DATE:</b>	03/29/21	<b>SCALE:</b>
<b>UNIT:</b>	mm	<b>TOLERANCE:</b> +/- 20 mm
<b>SITE:</b>	coolgear.com	<b>CONTACT:</b> support@coolgear.com