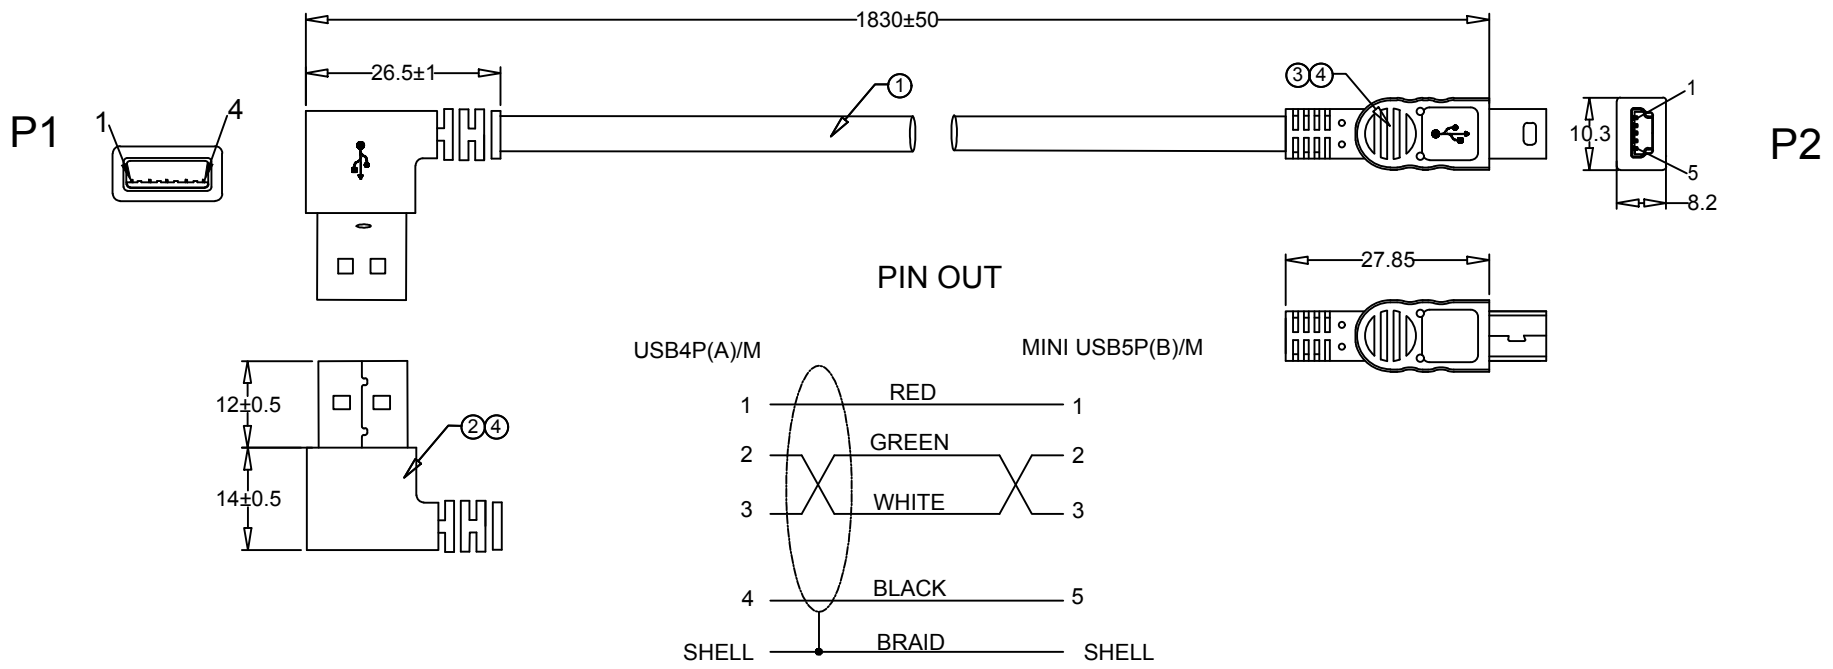


1. Electronic Tests:
   1>. Open/Short/Intermittence: 100%
   2>. Insulation Resistance: DC 300V 0.01S 5MΩ Min
   3>.Conducor Resistance: 3Ω Max;

NO.	NAME	SPECIFICATIONS	Q'TY	UNIT
4	Outer Mold	45P PVC, Black	12	G
3	Connector	MINI 5P B/M Pin Gold-plated, Shell Nickel-plated ,Black Insulation plastic	1	PCS
2	Connector	USB2.0 A/M Pin Gold-plated, Shell Nickel-plated ,white Insulation plastic	1	PCS
1	Cable	USB [24AWG(11/0.16)*1P+20AWG(26/0.16)*2C+AL+D1/0.25+BD 48/0.12AM OD:5.0mm PVC JACKET	1.83	M

coolgear

		MODEL #:	USBG-6FABM
		PAGE:	1 / 1
DRAW:	Jesse Woodward	**NOTES:**	
DATE:	7/6/2023	**SCALE:**	1mm = 1mm
UNIT:	mm	**TOLERANCE:**	+/- 0.3 mm
SITE:	coolgear.com	**CONTACT:**	support@coolgear.com