



All materials compliant with RoHS, REACH standards


REV.	DATE	DESCRIPTION
A0	2023.12.05	ISSUE

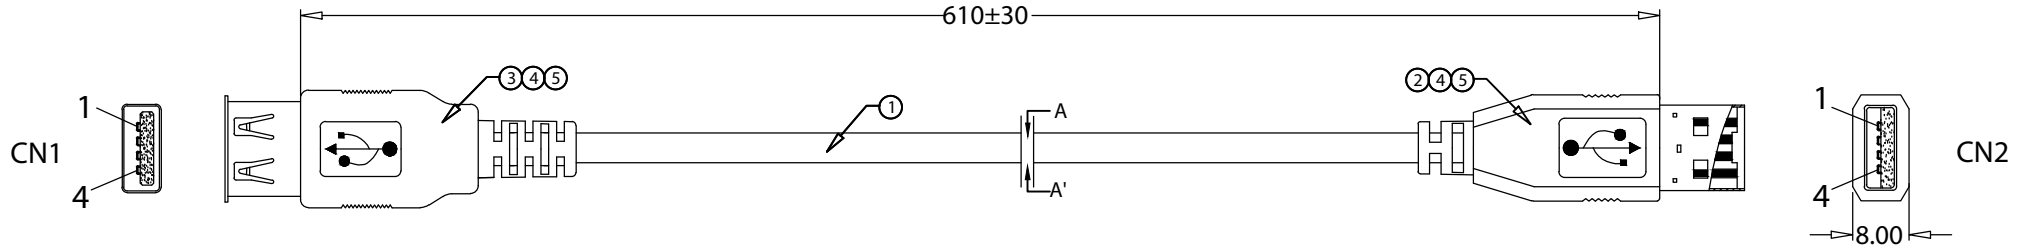

Pin Out:

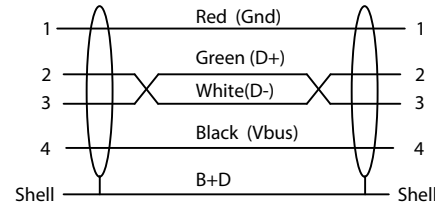

SEC:A--A'

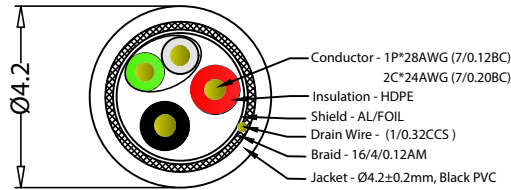

Electronic Tests:

- A. Open/Short/Intermittence: 100%
- B. Hi-Pot: AC 150V 0.01S 2mA
- C. Insulation Resistance: DC 300V 0.01S 10MΩ min
- D. Conductor Resistance: 3Ω max

NO.	NAME	SPECIFICATIONS	Q'TY	UNIT
5	Outer Mold	45P PVC, Black	15	G
4	Inner Mold	LDPE	3	G
3	Connector	USB 2.0 A Female Pin Gold-plated,shell Nickel-plated	1	PCS
2	Connector	USB 2.0 A Male Pin Gold-plated,shell Nickel-plated	1	PCS
1	Cable	USB2.0 28#(7/0.12BC)*2C+24#(7/0.20BC)*2C+AL+D(1/0.32CCS)+B(64/0.12AM) OD:4.2±0.2mm PVC Jacket Black	0.62	M

	MODEL #:	AA2FT-B
	PAGE:	1 / 1
DRAW: Jesse Woodward	NOTES:	
DATE: 05/13/2024	SCALE:	1mm = 1mm
UNIT: mm	TOLERANCE:	+/- 0.15 mm
SITE: coolgear.com	CONTACT:	support@coolgear.com