


Technical Data Sheet Rev 06-240821

4 Port USB to RS485 High Speed Adapter w/12V DC Power Supply

Model Number: CG-UHS4P485

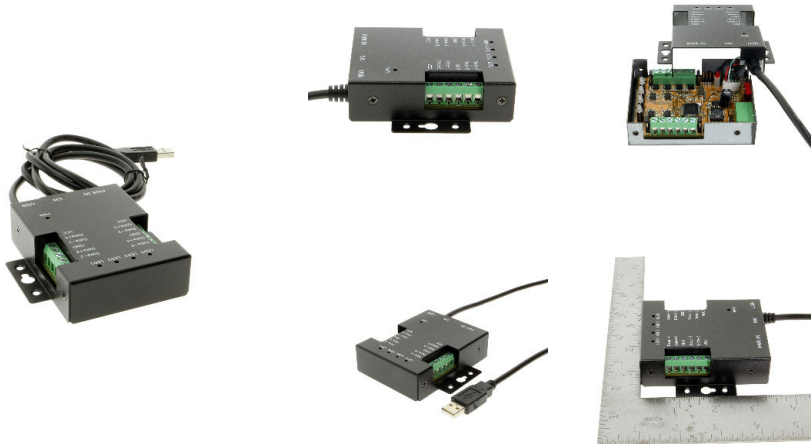

Features

- LEDs indicate operation mode, port status, activity and error for easy port monitoring and diagnosis
- Serial port protected with surge protection of 15kV
- Includes 12VDC power adapter with locking screw terminal power jack for reliable connection
- Each RS-485 port with 2kb receive buffer and 2kb transmit buffer

Package Contents

- Driver/Software Disk
- Power Cable
- Power Supply
- USB Serial Adapter

Specifications

OVERVIEW

Model No	CG-UHS4P485
Product Type	USB Serial Adapter
Compliance	RoHS
UPC	045079161191
Country of Origin	Taiwan
LED indicators	Activity Fault Port Status
Chipset	-
Electrical Protections	15KV

PHYSICAL

Ship Weight (lbs)	1.18 lbs
Ship Weight (kg)	0.54 kg
Material	Steel
Color	Black
Mountable	Din-Rail Surface Mount

Specifications Cont.

CONNECTIONS

USB Specification	USB 2.0
Connector(s)	6-Pin Terminal Block USB 2.0 Type A Male
Maximum Data Rate	12 Mbps

SERIAL SPECS

Maximum Data Rate	12 Mbps
Minimum Data Rate	-
Data Bits	7, 8
Parity	None, Even, Odd, Mark, Space
Stop Bits	1, 2
Flow Control	Hardware (RTS, CTS), XON/XOFF
FIFO	2k Bytes transmit and receive
Serial Modes	RS485
RS485 2-wire Signals	Data-, Data+, GND

ENVIRONMENTAL

Operating Temperature	0C ~ 55C
Storage Temperature	-20C ~ 75C
Operating Humidity	5% to 95% RH

OS SUPPORT

Supported Operating Systems	Linux OSX 10 Windows 10 Windows 8 Windows 7 Windows Vista Windows XP
-----------------------------	--

WARRANTY

Warranty Period	1 Year
-----------------	--------

PRODUCT URL

Product Page	https://www.coolgear.com/product/4-port-usb-rs485-high-speed-adapter-12vdc-power-supply
--------------	---

USB CHARGING & CONNECTIVITY EXPERTS

We Speak Your Speak



When you reach out to Coolgear support, you'll find yourself in the hands of a solution-oriented and knowledgeable expert ready to answer whatever question you throw at them. Go ahead, test us.

[Visit Support](#)