
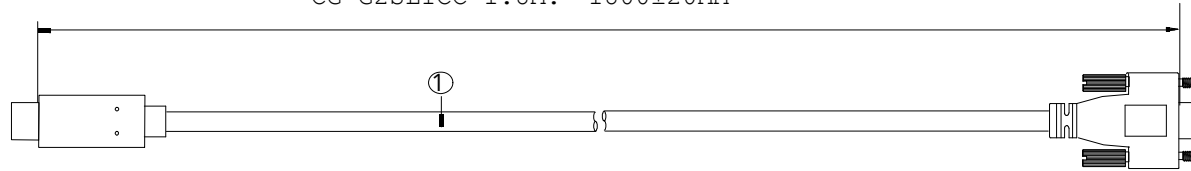


All materials compliant with RoHS, REACH and PrO65 standards


REV.	DATE	DESCRIPTION
A0	2021.04.17	ISSUE

CG-G2SL1CC-05M: 500±20MM
 CG-G2SL1CC-1M: 1000±20MM
 CG-G2SL1CC-1.8M: 1800±20MM


P1
 USB3.1 CM



P2
 USB3.1 CM



PIN OUT

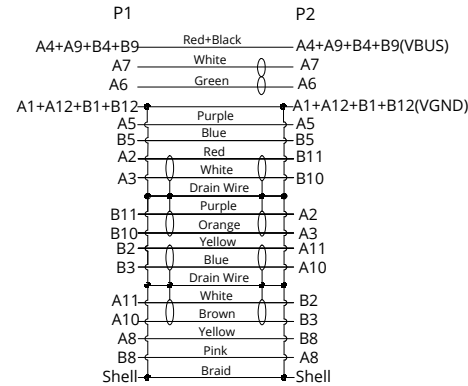

Electronic Tests:

- A. Open/Short/Intermittence: 100%
- B. Hi-Pot: AC 300V 0.01S 1mA
- C. Insulation Resistance: DC 300V 0.01S 10MΩ Min
- D. Conductive Resistance: 3Ω Max

NO.	NAME	SPECIFICATIONS	Q'TY	UNIT
5	OUTER MOLDING	45P PVC, Black	10	G
4	INNER MOLDING	LDPE	10	G
3	CONNECTOR	USB3.1 C Male, Pin Gold Fish, Shell Nickel Plated, with PCB and E-mark	1	PCS
2	CONNECTOR	USB3.1 C Male, Pin Gold Fish, Shell Nickel Plated, with PCB	1	PCS
1	CABLE	USB3.1 [32AWG*1P+D+AL-MY]*4C+32AWG*1P+32AWG *4C+21AWG *2C+AL+B+PVC Jacket, OD:4.5± 0.2MM	AR	MM

	MODEL #:	CG-G2SL1CC	
	PAGE:	1 / 1	
	NOTES:	USB 3.1 Type-C to C Dual Screw Lock Cable 10GB Data 5A Power	
DRAW:			
DATE:	03/29/21	SCALE:	
UNIT:	mm	TOLERANCE:	+/- 20 mm
SITE:	coolgear.com	CONTACT:	support@coolgear.com