


All materials compliant with RoHS, REACH standards

REV.	DATE	DESCRIPTION

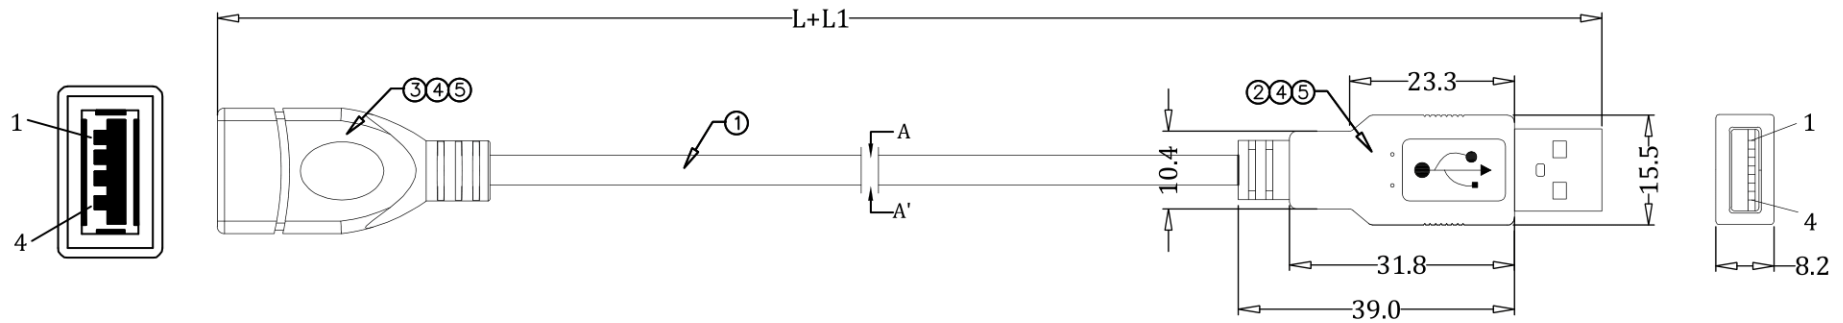


Pin Out:

CN1	WIRE	CN2
Vbus	1 Red	1 Vbus
D-	2 White	2 D-
D+	3 Green	3 D+
Gnd	4 Black	4 Gnd
Shell		Shell

Length table

Model	L±L1
AA-UF-05B	153±10mm
AA-UF-1B	305±20mm
AA-UF-2B	610±20mm
AA-UF-3B	915±30mm
AA-UF-6B	1830±50mm

SEC:A--A'

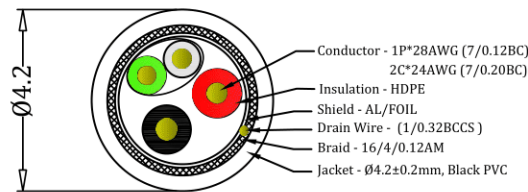

Electronic Tests:

- A. Open/Short/Intermittence: 100%
- B. Hi-Pot: AC 150V 0.01S 2mA
- C. Insulation Resistance: DC 300V 0.01S 10MΩ min
- D. Conductor Resistance: 2Ω max



NO.	NAME	SPECIFICATIONS	Q'TY	UNIT
5	Outer Mold	45P PVC, Black	15	G
4	Inner Mold	LDPE	3	G
3	Connector	USB 2.0 A Female Pin Gold-plated, shell Ni-plated	1	PCS
2	Connector	USB 2.0 AM Pin Gold-plated, shell Ni-plated, with Shielding box	1	PCS
1	Cable	USB2.0 28#(7/0.12BC)*2C+24#(7/0.20BC)*2C+AL+D(1/0.32BCCS)+B(64/0.12AM) OD:4.2±0.2mm PVC Jacket Black	**	M

THIRD ANGLE PROJECTION		Model No.	AA-UF-XB
-TOLERANCES- LENGTH: X±0.3 .X±0.2 .XX±0.1 ANGLE: X°±2° .X°±1° .XX°±0.5°	Drawing No.	AA-UF-XB	
	Product Description	USB2.0 A/M-USB A/F Extension Cable	
	Units:mm	Approved:	
Page: 1 of 1	Check:		
	Design:		