



All materials compliant with RoHS, REACH standards


REV.	DATE	DESCRIPTION

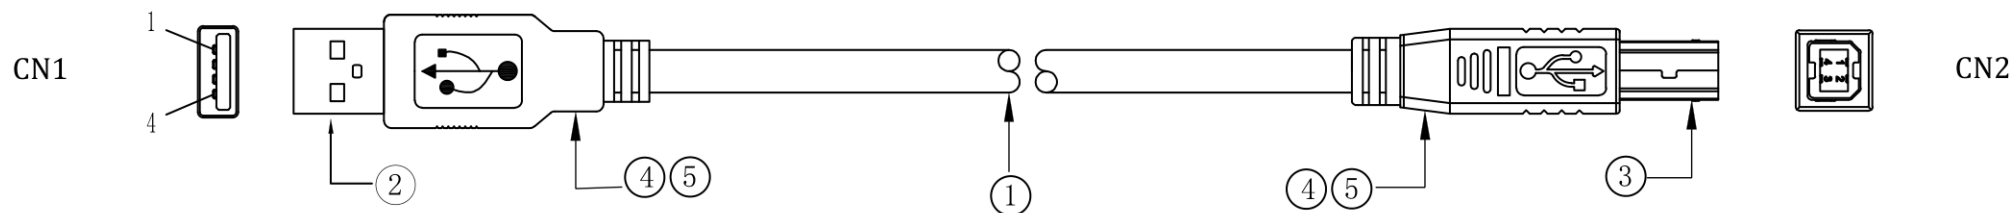

CABLE CONSTRUCTURE

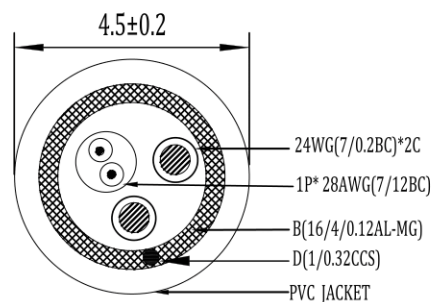

PIN OUT

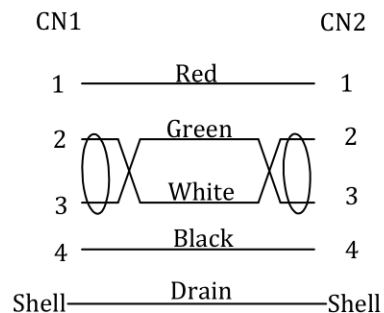

Length table

P/N	L±L1
AB1FT-W	310±20mm
AB2FT-W	610±30mm
AB3FT-W	910±30mm
AB4FT-W	1220±30mm
AB5FT-W	1520±50mm
AB6FT-W	1830±50mm

Electronic Tests:

- A. Open/Short/Intermittence: 100%
- C. Insulation Resistance: DC 300V 0.01S 10MΩ Min
- D. Conductive Resistance: 3Ω Max

5	Outer Mold	45P PVC, White	2	PCS
4	Inner Mold	LDPE	12	G
3	Connector	USB2.0 B Male, Pin Gold , Shell Nickel Plated	3	G
2	Connector	USB2.0 A Male, Pin Gold , Shell Nickel Plated	2	PCS
1	Cable	[(28AWG(7/0.12BC)*1P+AL*24AWG(7/0.20BC) +D(1/0.32CCS)+AL+B(16/4/0.12AL-MG) OD:4.5mm±0.2mm BLACK	10.02	M
NO.	NAME	SPECIFICATIONS	Q'TY	UNIT

coolgear					
 THIRD ANGLE PROJECTION -TOLERANCES- LENGTH: X±0.3 .X±0.2 .XX±0.1 ANGLE: X°±2° .X°±1° .XX°±0.5°	Model No.		AB*FT-W		
	Drawing No.		AB*FT-W		
	Product Description		USB2.0A/M-B/M Cable		
	Units:mm		Approved:		
	Page: 1 of 1		Check:		
Design:					