


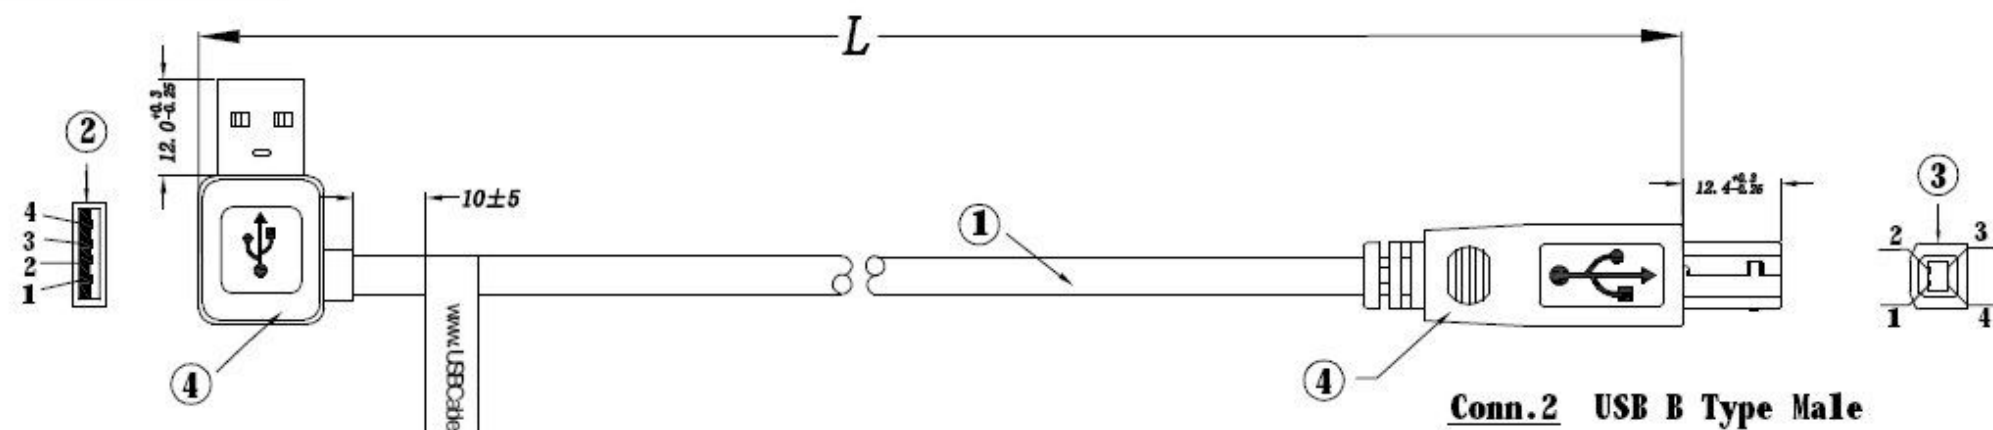

Conn.1 USB A Type Male

Conn.2 USB B Type Male


PART NO:	LENGTH	TOLERANCE
USB2.0-ARBS-0104W	1FT(305mm)	± 20 mm
USB2.0-ARBS-0204W	2FT(610mm)	± 20 mm
USB2.0-ARBS-0304W	3FT(915mm)	± 30 mm

Electrical Properties:

- 1.Contact Resistance:2ohm max
- 2.Insulation Resistance:10Mega ohm;
- 3.HI-POT:300VDC/10ms.
- 4.All Materials With RoHS Standard

MATERIAL LIST:

NO.	NAME	DESCRIPTION	UNIT	Q'TY
1	CABLE	USB 2.0 28AWGx1T/P+28AWGx2C Double Shield Jacket Color:Black OD:3.5 $\pm$ 0.15	mm	L
2	Connector	USB"A"male Solder Type Pin Gold Plated Insulation:White Terminal:Shell Nickel Plated	Set	1
3	Connector	MINI USB"B" Solder Type Pin Gold Plated Insulation:White Terminal:Shell Nickel Plated	Set	1
4	Outer Mold	50P PVC,Color:White	g	12
5	Label		pcs	1

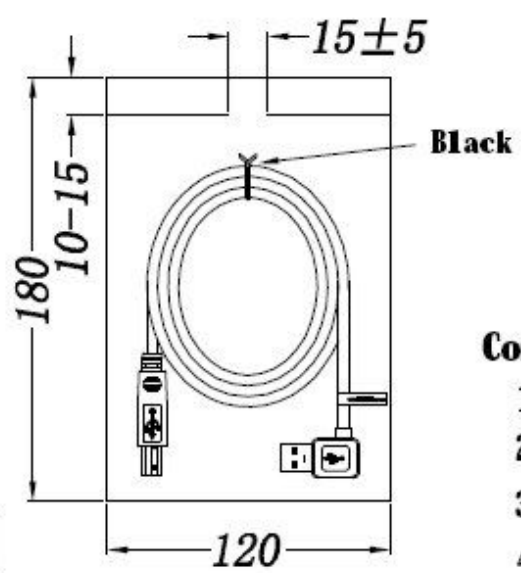

Pin Assignment	
Conn.1	Conn.2
1	1 RED
2	2 WHITE
3	3 GREEN
4	4 BLACK
Shell	Shell
Shield	Shield

CUSTOMER:USBGEAR		TECHNOLOGY LTD.	
DWG NO: US080327-05		SCALE: NONE	DRAWN BY: Schen
ITEM NO:		UNIT: mm	CHECKED BY:
USB2.0-ARBS-L04B		REV: A	APPROVED BY: