


REV.	DESCRIPTION	DATE
△		
△		

RoHS

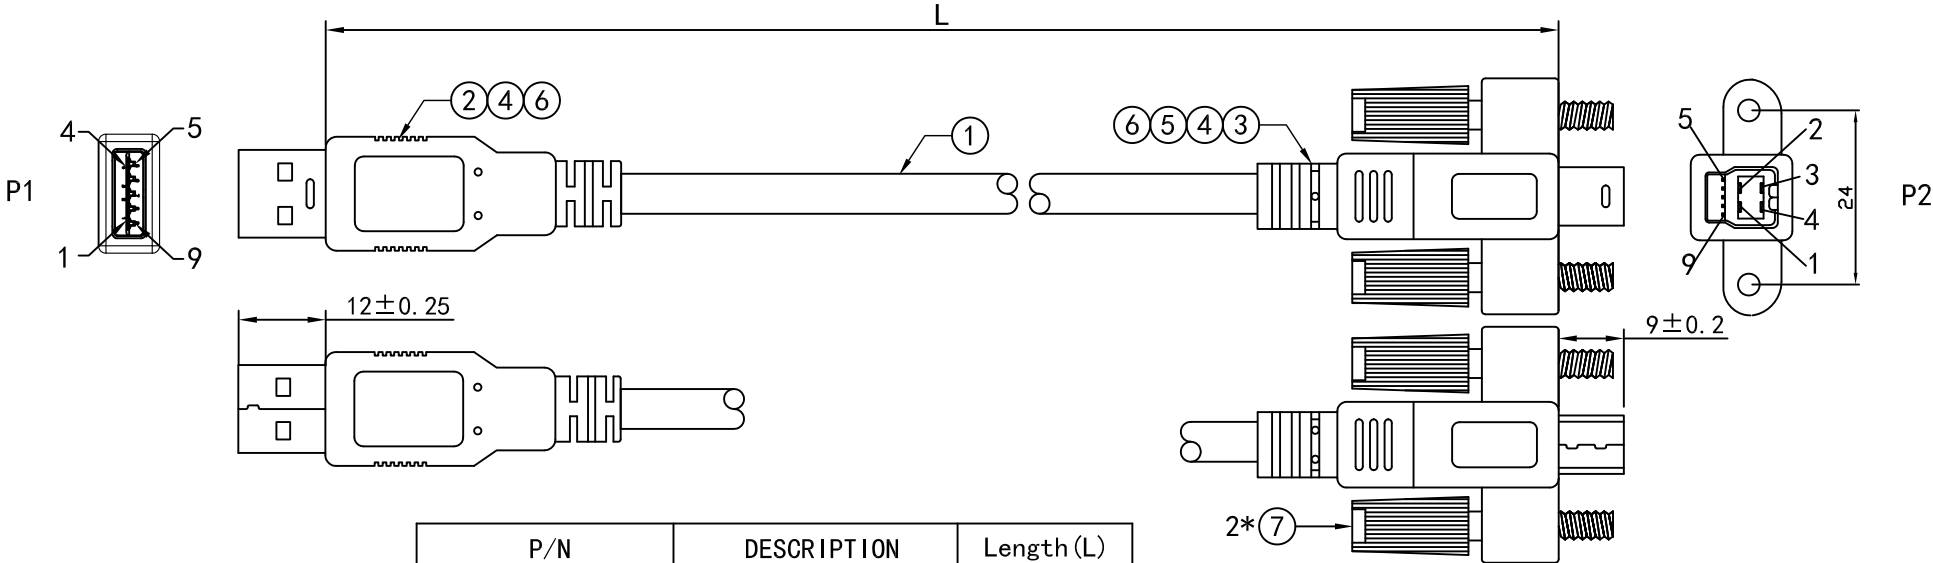

NOTE:

- 1. 100% OPEN & SHORT WIRE TEST;
- 2. CONTACT RESISTANCE 2ohm Max;
- 3. INSULATION RESISTANCE 10M ohm Min;
- 4. HI-POT DC 300V/0.01S;

PIN OUT		
P1		P2
1	RED	1
2	WHITE	2
3	GREEN	3
4	BLACK	4
5	BLUE	5
6	YELLOW	6
7	DRAIN	7
8	PURPLE	8
9	ORANGE	9
SHELL	DRAIN+BRAID	SHELL

7	SCREW	Black NICKEL-CU #4-40UNC (Low lead-CU Below 1000ppm)	2PCS	
6	OUT-MOLD	PVC 45P BLACK	14G	
5	IN-MOLD	PE	6G	
4	COPPER	COPPER FOIL T:0.65*W:8*L:20MM	2PCS	
3	CONN 2	USB (3.0) B TYPE MALE BLUE PIN/GF NICKEL-SHELL	1SET	
2	CONN 1	USB (3.0) A TYPE MALE BLUE PIN/GF NICKEL-SHELL	1SET	
1	CABLE	UL20276 (USB3.0 Cable) (1P#28+DAM)*2C+1P#28+2C#24+AL+D+B (16/6/0.12AL) OD:5.5MM BLACK PVC L:xxxxMM	1PCS	
NO.	MATERIAL. P/N	DESCRIPTION	Q'TY	VENDOR

		PAGE:	1 / 1
		NOTES:	USB 3.2 Gen 1 Type-B Screw-Lock to Type-A Cable
		SCALE:	1mm = 1mm
		CONTACT:	support@coolgear.com
DRAW:	Jesse Woodward		
DATE:	01/15/2026		
UNIT:	mm		
SITE:	coolgear.com		