


All materials compliant with RoHS, REACH standards


REV.	DATE	DESCRIPTION
------	------	-------------

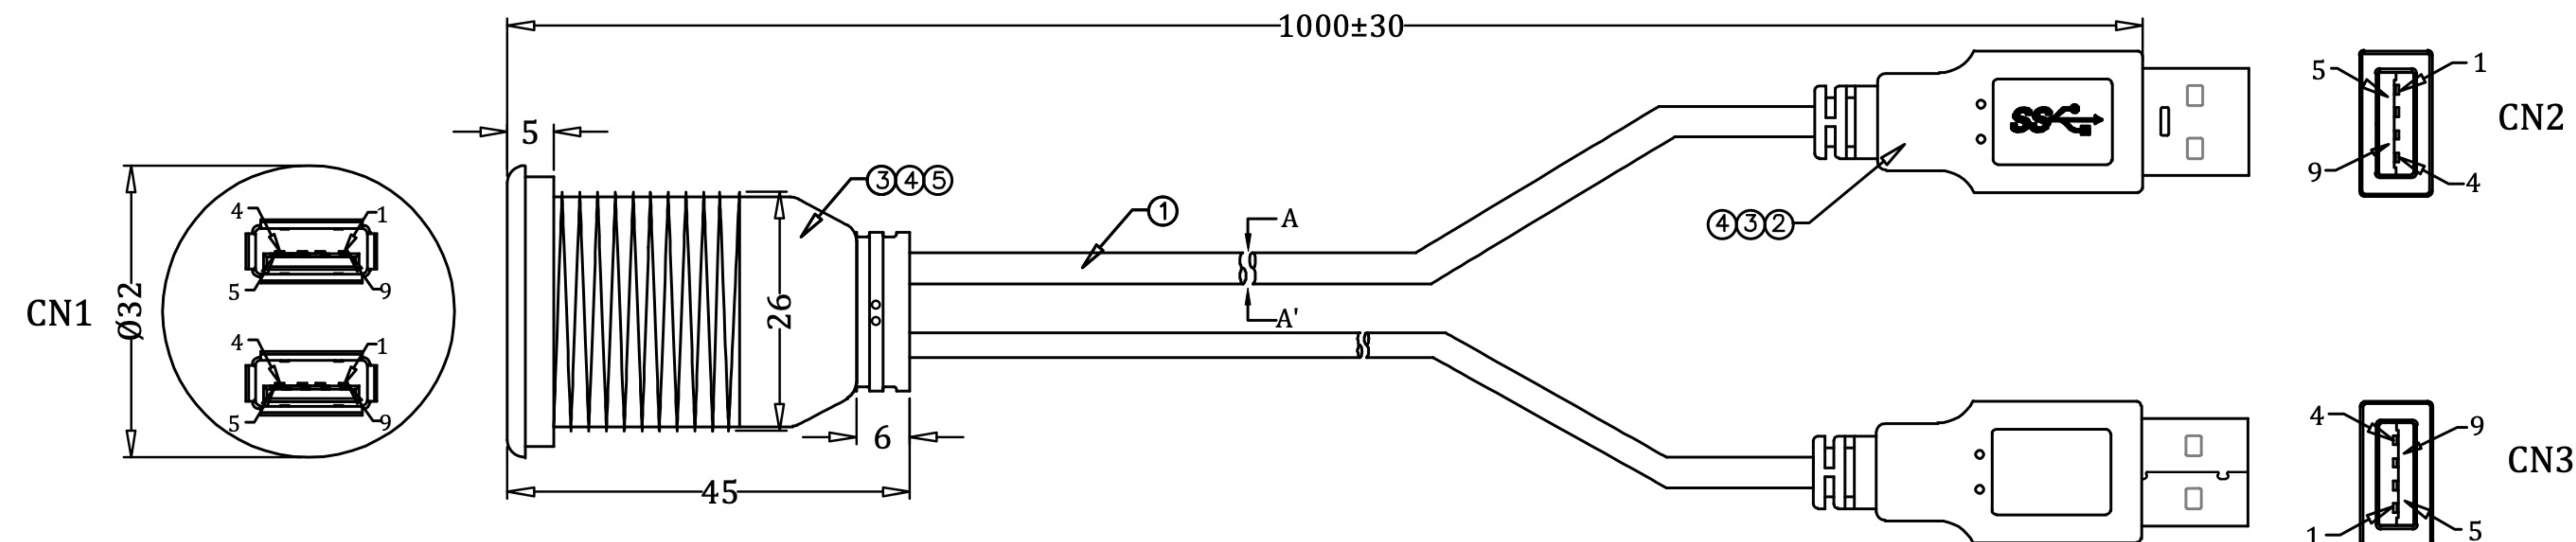

Pin Out:

CN1	WIRE	CN2
Vbus	1 Red	1 Vbus
D-	2 Green	2 D-
D+	3 White	3 D+
RX1+	6 Blue	6 RX1+
RX1-	5 Yellow	5 RX1-
7	Drain wire	Gnd
TX1+	9 Purple	9 TX1+
TX1-	8 Orange	8 TX1-
Gnd	4 Black	4 Gnd
Shell	Braid+DW	Shell

SEC:A--A'



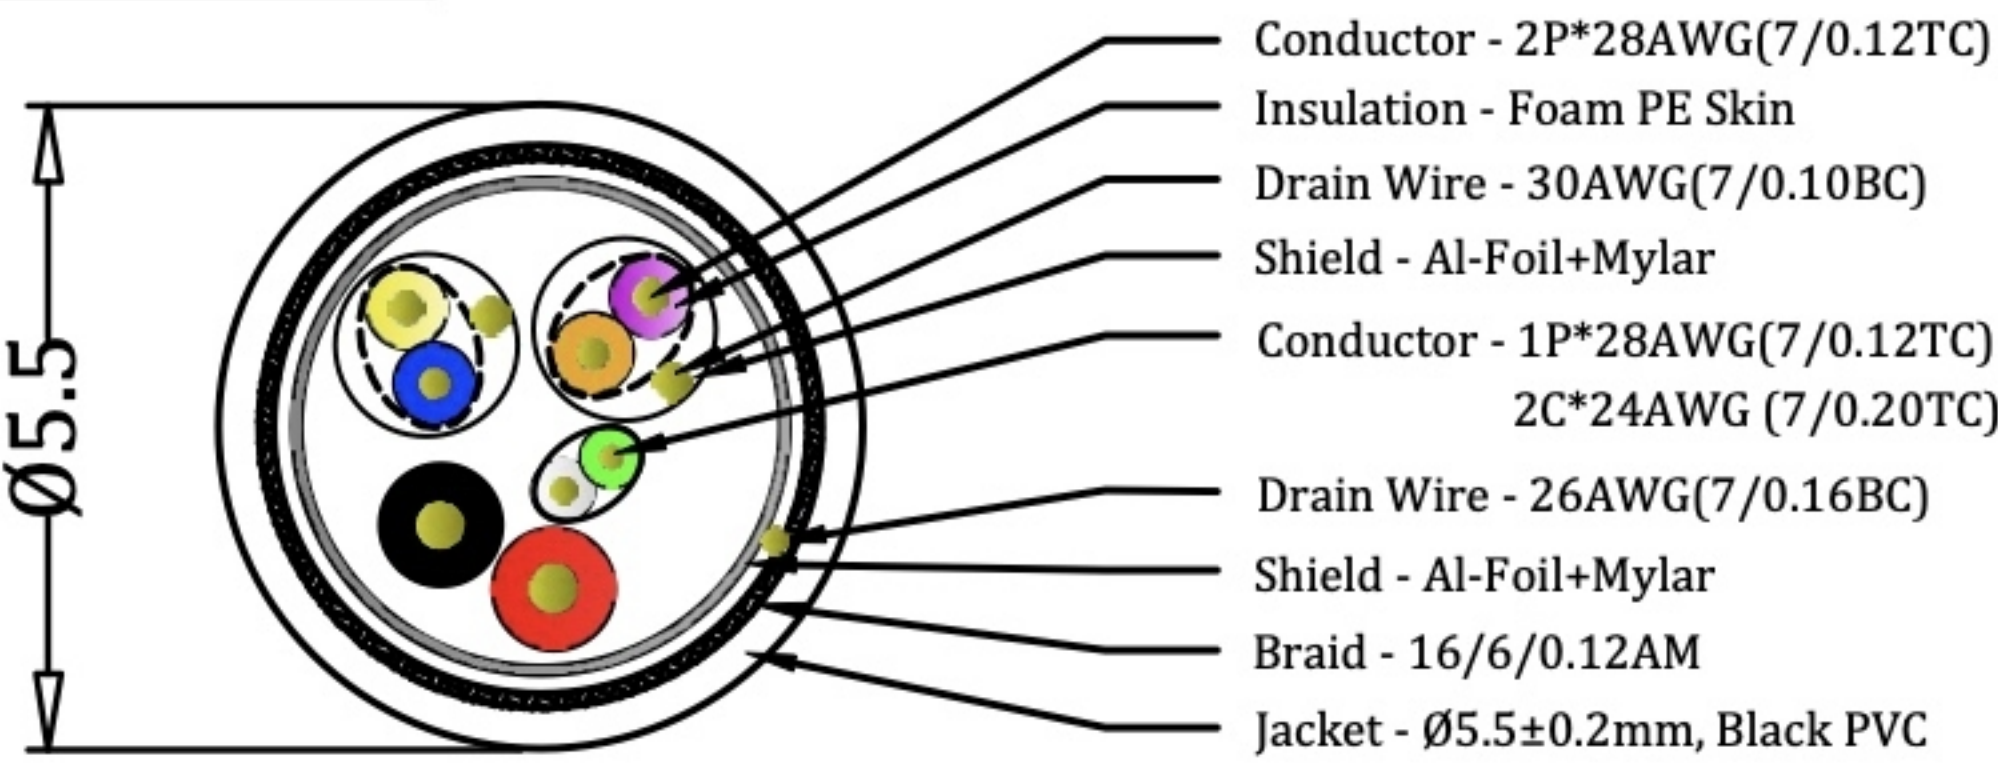


- Electronic Tests:
- A. Open/Short/Intermittence: 100%
 - B. Hi-Pot: AC 150V 0.01S 2mA
 - C. Insulation Resistance: DC 300V 0.01S 10MΩ min
 - D. Conductor Resistance: 3Ω max

5	Outer Mold	45P PVC, Black	15	G
4	Inner Mold	LDPE	3	G
3	Connector	USB A Female Pin Gold-plated,shell Ni-plated,Blue Insulation plastic	2	PCS
2	Connector	USB A Mmale Pin Gold-plated,shell Ni-plated,Blue Insulation plastic	2	PCS
1	Cable1	USB [28#(7/0.12TC)*2C+D(7/0.10BC)+AM]*2+28#(7/0.12TC)*1P+ 24#(7/0.20TC)*2C+AL+D(7/0.16BC)+B(96/0.12AM) OD:5.5±0.2mm PVC Jacket Black	2	M
NO.	NAME	SPECIFICATIONS	Q'TY	UNIT

THIRD ANGLE PROJECTION
-TOLERANCES- LENGTH: X±0.3 .X±0.2 .XX±0.1 ANGLE: X°±2° .X°±1° .XX°±0.5°

		MODEL #:	CG-USB3PX2A-3ft
		PAGE:	1 / 2
		NOTES:	
		SCALE:	1mm = 1mm
DRAW:	R.A.		
DATE:	11/20/2025		
UNIT:	mm		
SITE:	coolgear.com	CONTACT:	support@coolgear.com

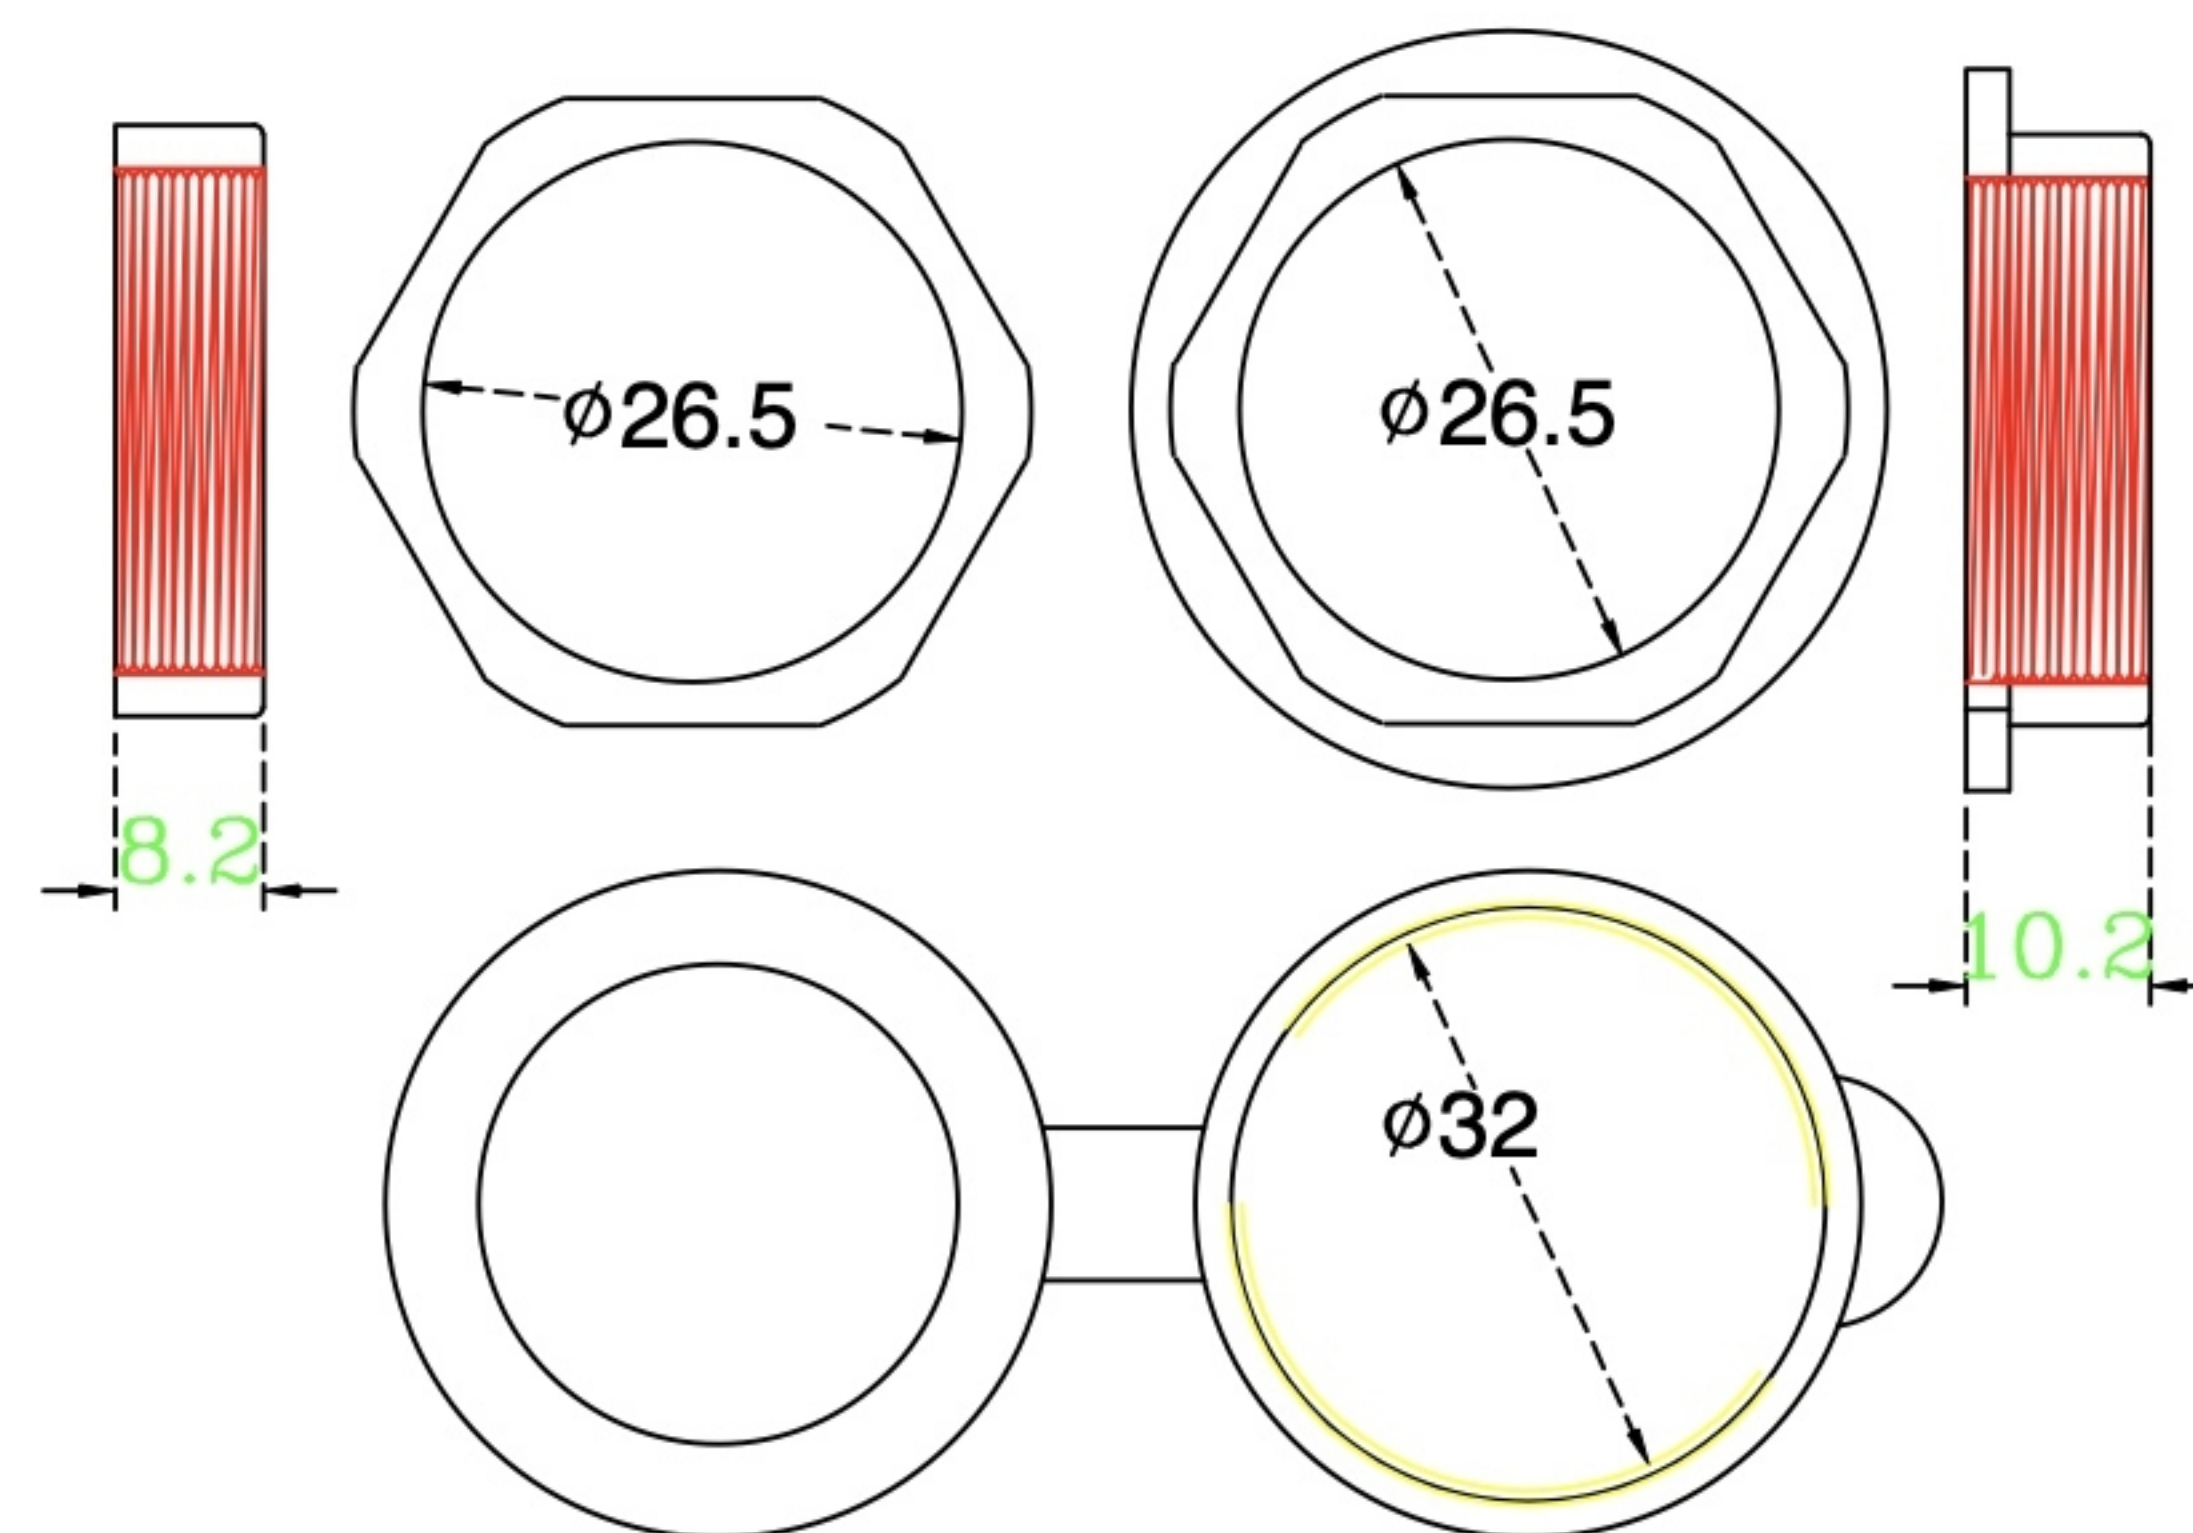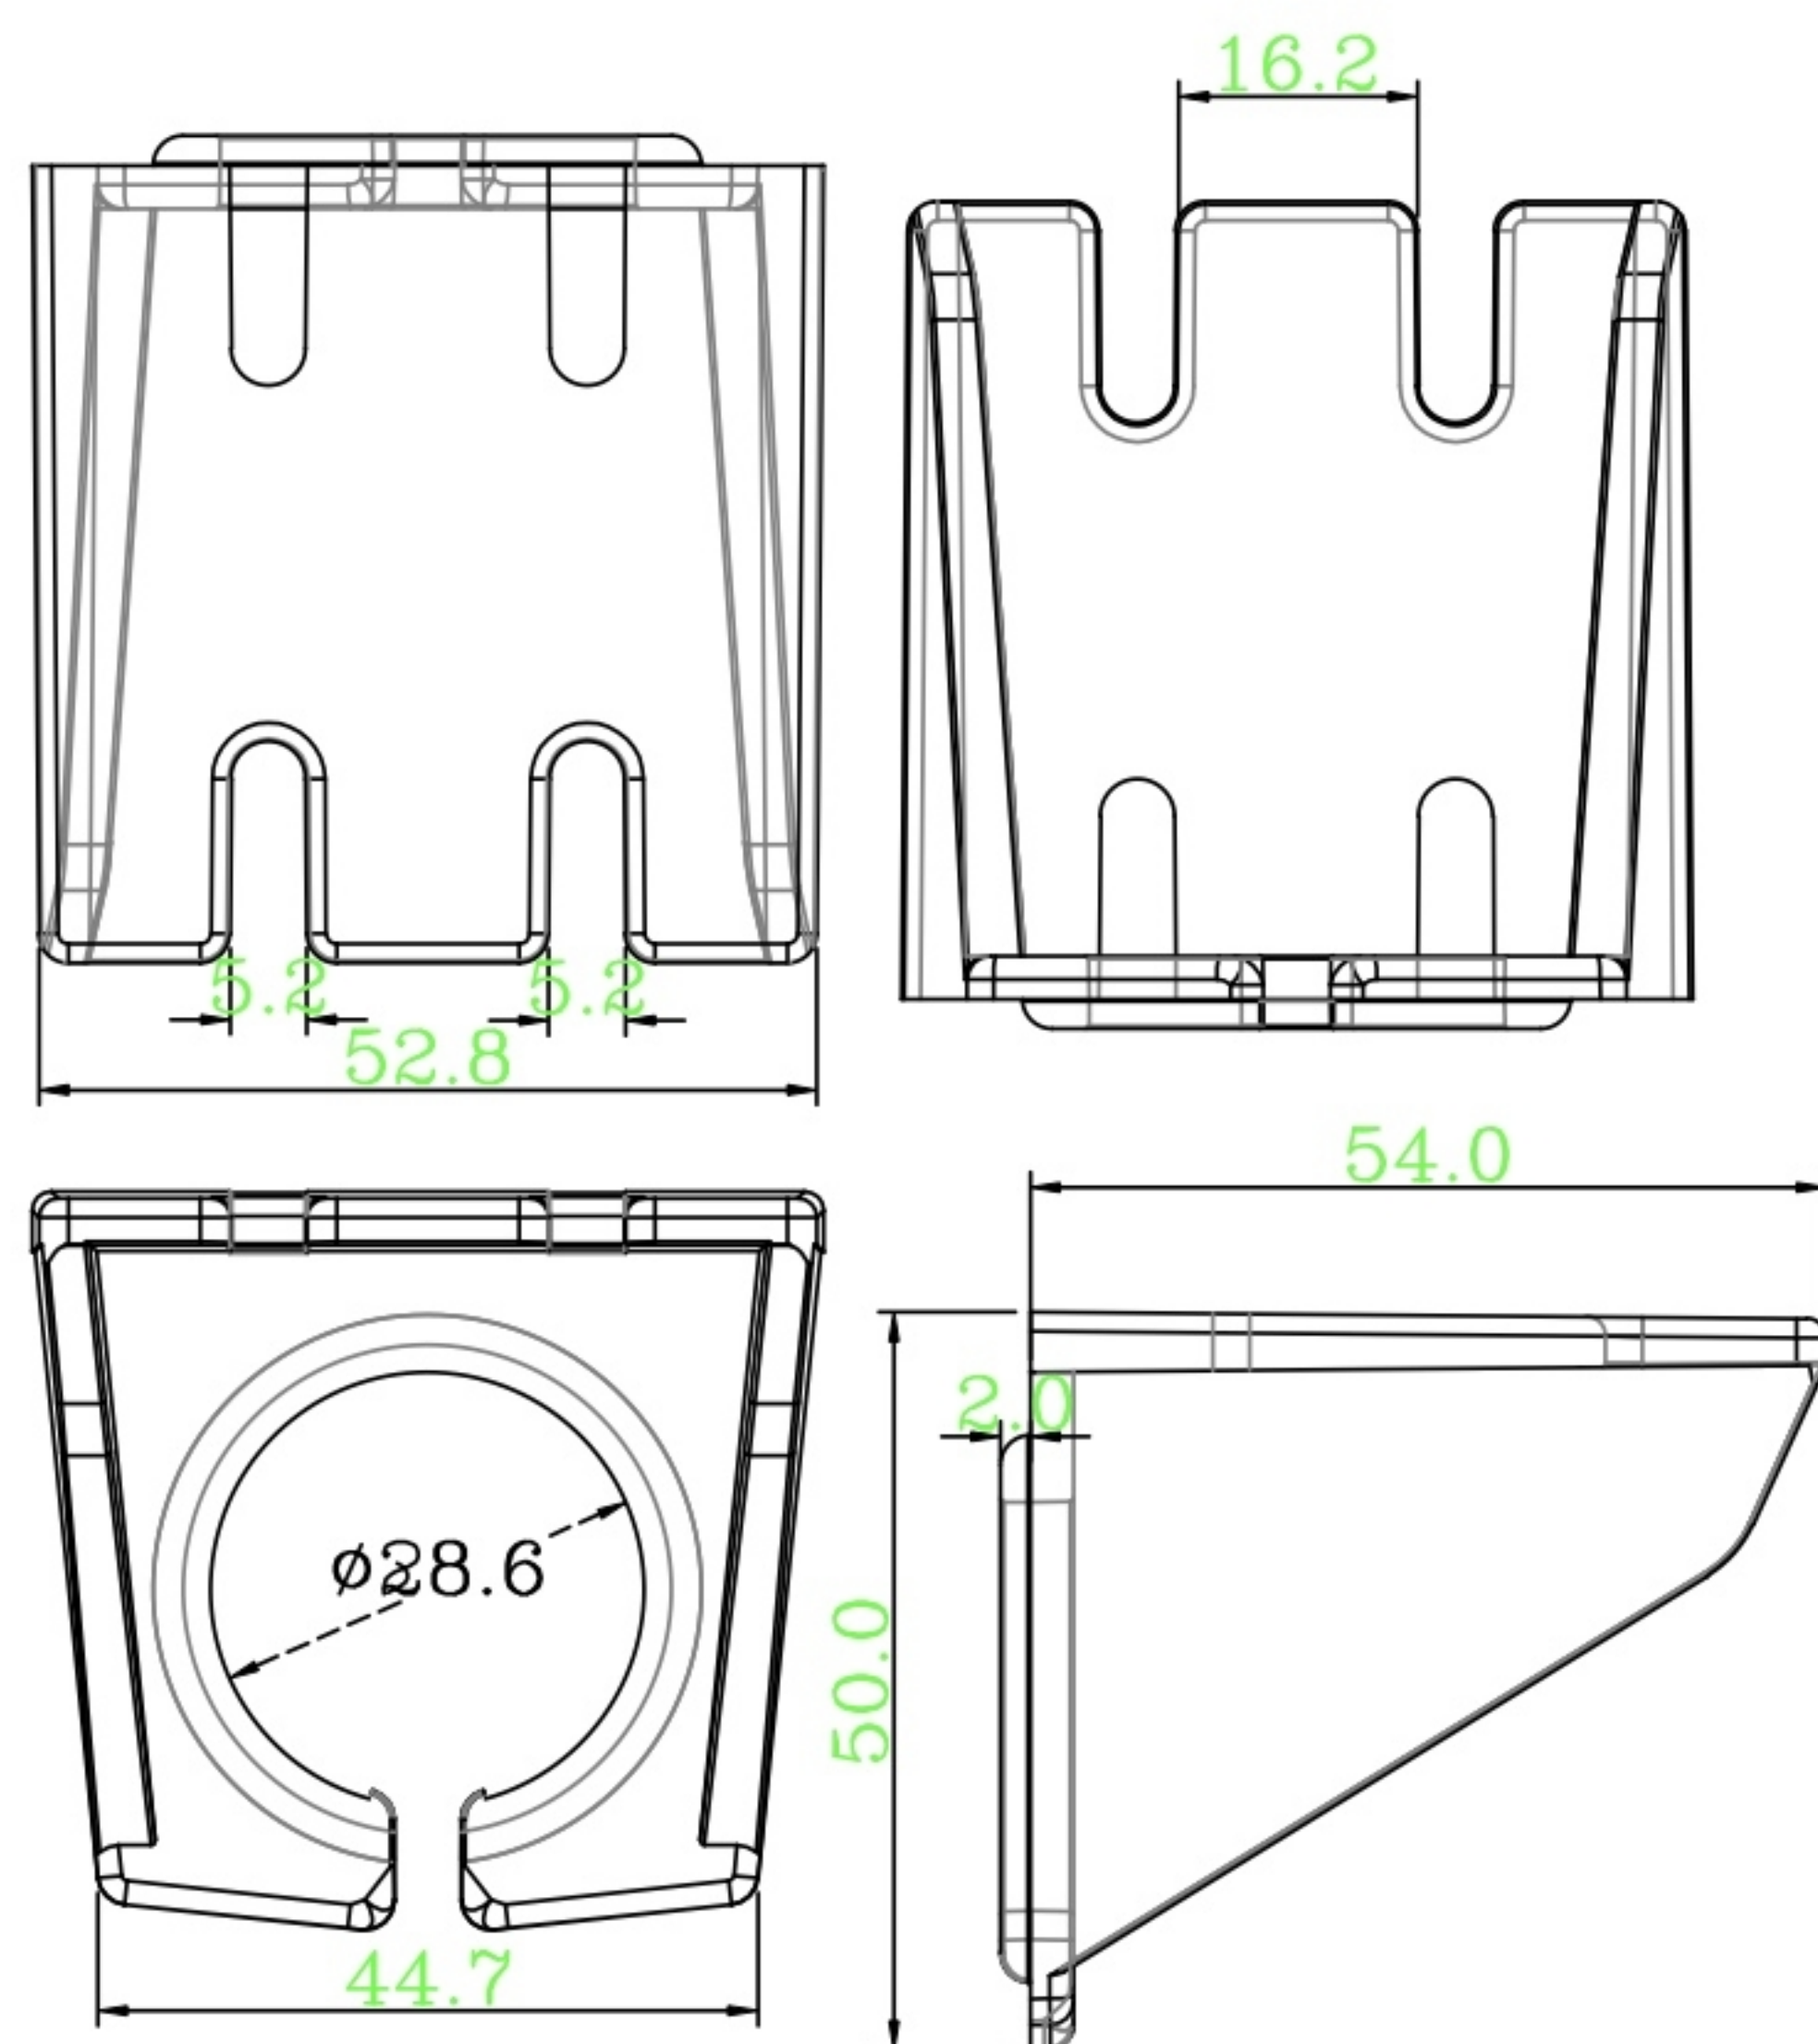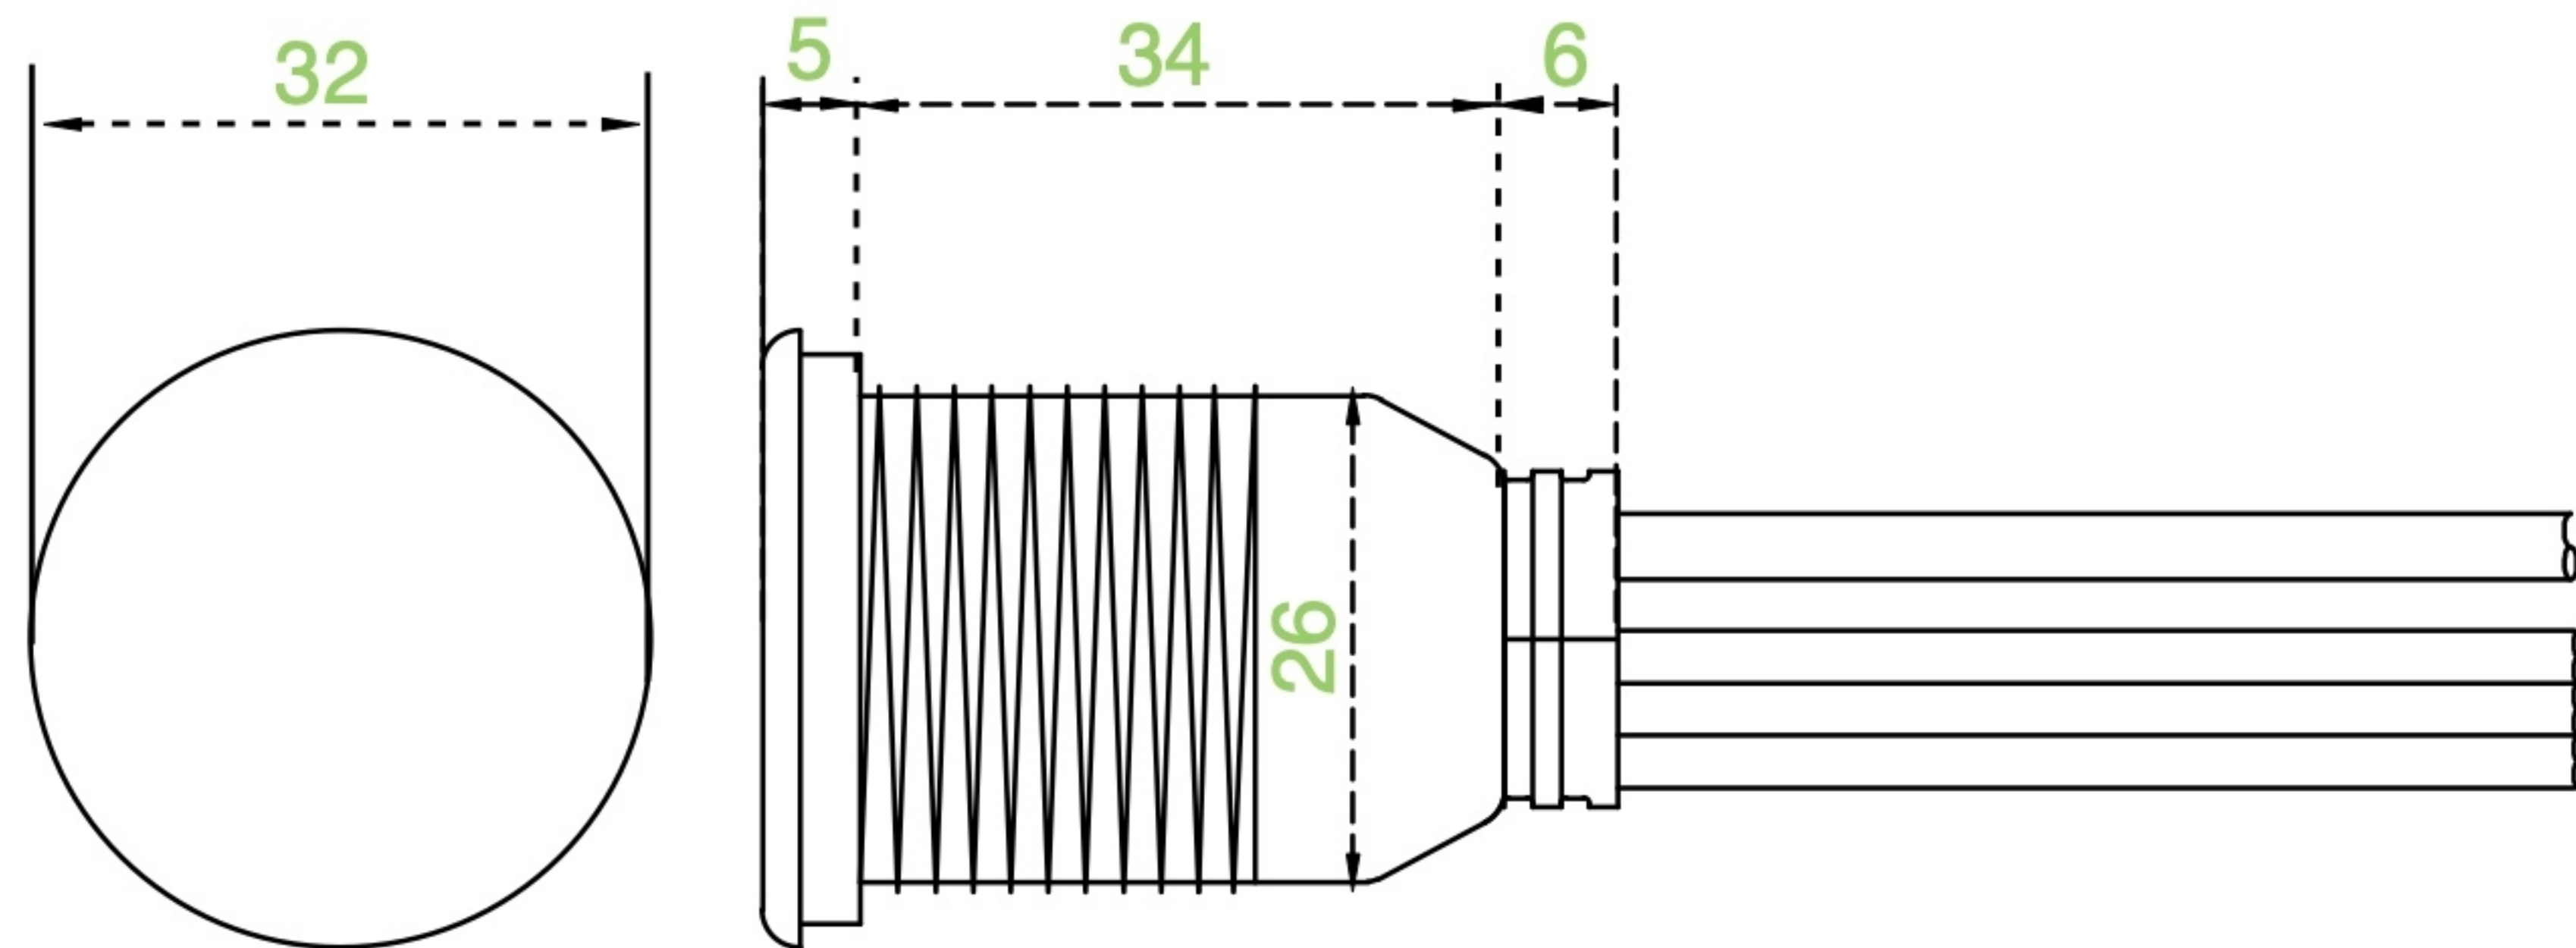

		MODEL #:	CG-USB3PX2A-3ft
		PAGE:	2 / 2
		NOTES:	
DRAW:	R.A.	SCALE:	1mm = 1mm
DATE:	11/20/2025		
UNIT:	mm		
SITE:	coolgear.com	CONTACT:	support@coolgear.com