


REV.

DESCRIPTION

DATE


RoHS

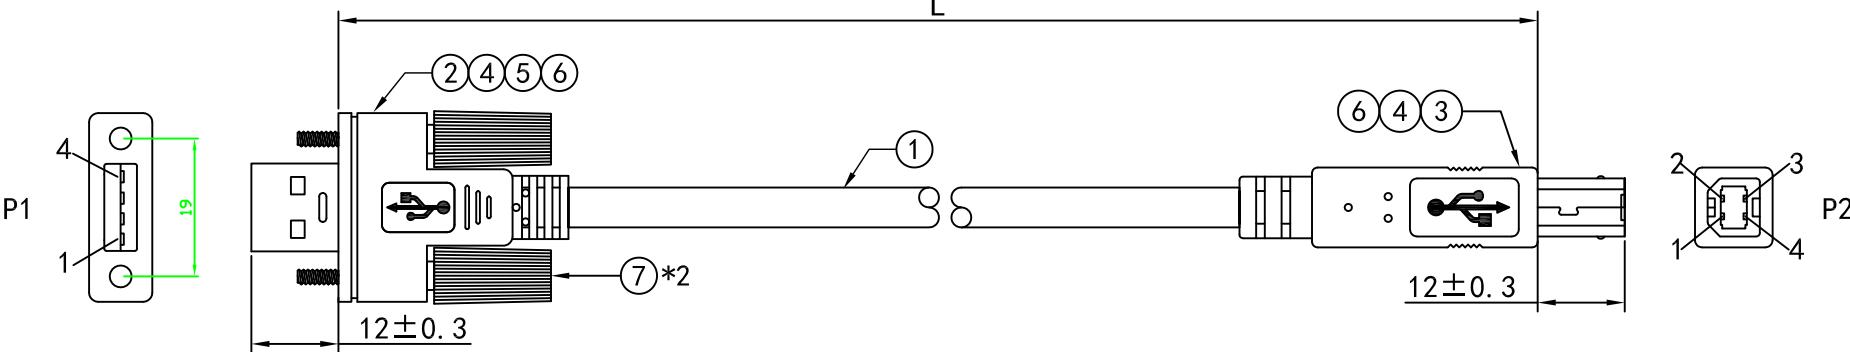

P/N	DESCRIPTION	L
USB2-SLAB-18IN	USB2.0 AM/TYPE BM-3FT	915 ± 20MM
USB2-SLAB-3FT	USB2.0 AM/TYPE BM-6FT	1830 ± 40MM
USB2-SLAB-6FT	USB2.0 AM/TYPE BM-10FT	3050 ± 50MM

NOTE:

1. 100% OPEN & SHORT WIRE TEST;
2. CONTACT RESISTANCE 2ohm Max;
3. INSULATION RESISTANCE 10M ohm Min;
4. HI-POT DC 300V/0.01S;

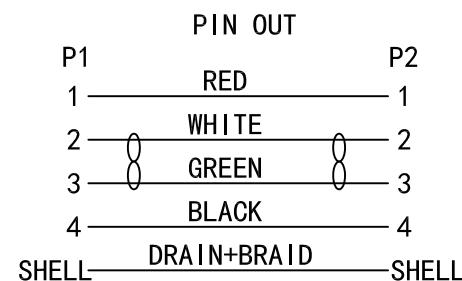

7	SCREW	Black NICKEL-CU #4-40UNC (Low Lead-CU Below 1000ppm)	2PCS	
6	OUT-MOLD	PVC 45P BLACK	10G	
5	IN-MOLD	PE	3G	
4	COPPER	COPPER FOIL T:0.65*W:8*L:15MM	2PCS	
3	CONN 2	USB (2.0) BM WHITE PIN/GF NICKEL-SHELL (three-piece)	1SET	
2	CONN 1	USB (2.0) AM WHITE PIN/GF NICKEL-SHELL (three-piece)	1SET	
1	CABLE	UL2725 (USB2.0 Cable) 1P#28+2C#24+AL+D+B (16/5/0.12AM) OD:4.5MM BLACK L:xx MM	1PCS	A401240990006
NO.	MATERIAL. P/N	DESCRIPTION	Q' TY	VENDOR

	MODEL #:	USB2-SLAB
	PAGE:	1 / 1
DRAW:	Notes: Jesse Woodward	USB 2.0 Screw-Locking Type-A to Type-B Cable
DATE:	12/16/2025	SCALE: 1mm = 1mm
UNIT:	mm	TOLERANCE: +/- 0.15 mm
SITE:	coolgear.com	CONTACT: support@gearmo.com