


REV.


DESCRIPTION

DATE

RoHS

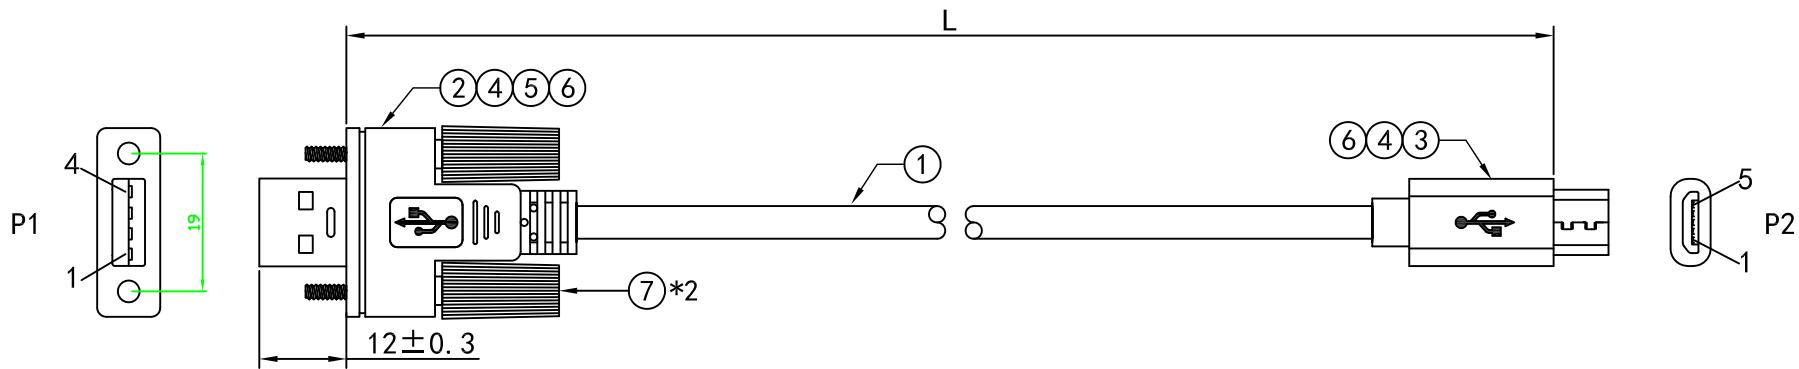

P/N	DESCRIPTION	L
USB2-SLAMICB-3FT	USB2.0 AM/Micro BM-3FT	915 ± 20MM
USB2-SLAMICB-6FT	USB2.0 AM/Micro BM-6FT	1830 ± 40MM



NOTE:

1. 100% OPEN & SHORT WIRE TEST;
2. CONTACT RESISTANCE 2ohm Max;
3. INSULATION RESISTANCE 10M ohm Min;
4. HI-POT DC 300V/0.01S;

PIN OUT	
P1	P2
1 RED	1
2 WHITE	2
3 GREEN	3
4 BLACK	5
SHELL	DRAIN+BRAID
	SHELL

7	SCREW	Black NICKEL-CU #4-40UNC (Low Lead-CU Below 1000ppm)	2PCS	
6	OUT-MOLD	PVC 45P BLACK	10G	
5	IN-MOLD	PE	3G	
4	COPPER	COPPER FOIL T:0.65*W:8*L:15MM	2PCS	
3	CONN 2	USB(2.0) Micro BM Black PIN/GF NICKEL-SHELL (three-piece)	1SET	
2	CONN 1	USB(2.0) AM WHITE PIN/GF NICKEL-SHELL (three-piece)	1SET	
1	CABLE	UL2725 (USB2.0 Cable) 1P#28+2C#24+AL+D+B (16/5/0.12AM) OD:4.5MM BLACK L:xx MM	1PCS	A401240990006
NO.	MATERIAL. P/N	DESCRIPTION	Q' TY	VENDOR

CABLEMAX	MODEL #:	USB2-SLAMICB-XFT
	PAGE:	1 / 1
NOTES:	DRAW:	Jesse W.
	DATE:	12/15/2025
	UNIT:	mm
	SCALE:	1mm = 1mm
SITE:	cablemax.com	CONTACT: cablemax.com/contact