

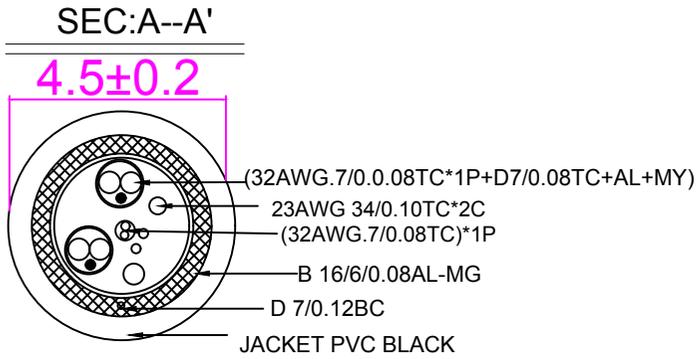


All materials compliant with RoHS, REACH standards

REV.	DATE	DESCRIPTION
A0	2025.08.06	ISSUE

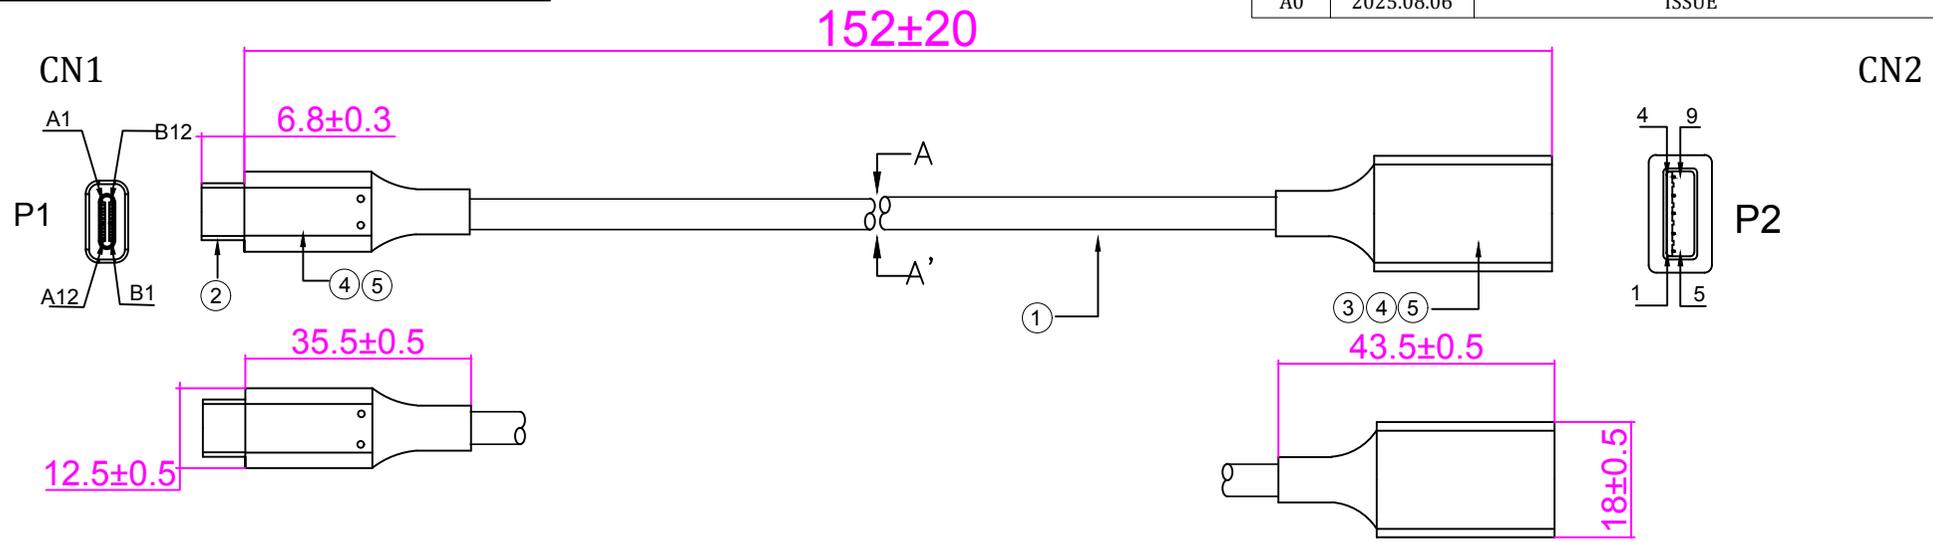

Circuit Diagram

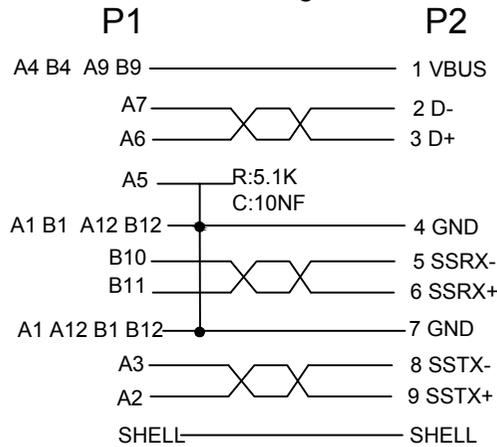

Electronic Tests:

- A. Open/Short/Intermittence: 100%
- B. Hi-Pot: AC 300V 0.01S 1mA
- C. Insulation Resistance: DC 300V 0.01S 10MΩ min
- D. Conductor Resistance: 3Ω max

NO.	NAME	SPECIFICATIONS	Q'TY	UNIT
5	Outer Mold	PVC 45P BLACK	10	G
4	Inner Mold	LDPE/Natural	8	G
3	Connector	USB3.0 A Female, , Pin Gold Flash,Shell Nickel-plated,Blue Insulation plastic	2	PCS
2	Connector	TYPE C Male, Pin Gold Flash,Shell Nickel-plated,Black Insulation plastic	2	PCS
1	Cable	USB3.0 (32AWG.7/0.08TC*1P+D7/0.08TC+AL)*2P+(32AWG.7/0.08TC)*1P+23AWG 34/0.10TC*2C+D7/0.12BC+B16/6/0.08AL-MG PVC OD:4.5MM Black	**	M

	MODEL #:	USB3-AFCM015B
	PAGE:	1 / 1
DRAW:	Jesse Woodward	NOTES: USB-C Male to USB-A Female Cable
DATE:	11/12/2025	
UNIT:	mm	TOLERANCE: +/- 0.15 mm
SITE:	coolgear.com	CONTACT: support@coolgear.com