


REV.

DESCRIPTION

DATE

RoHS

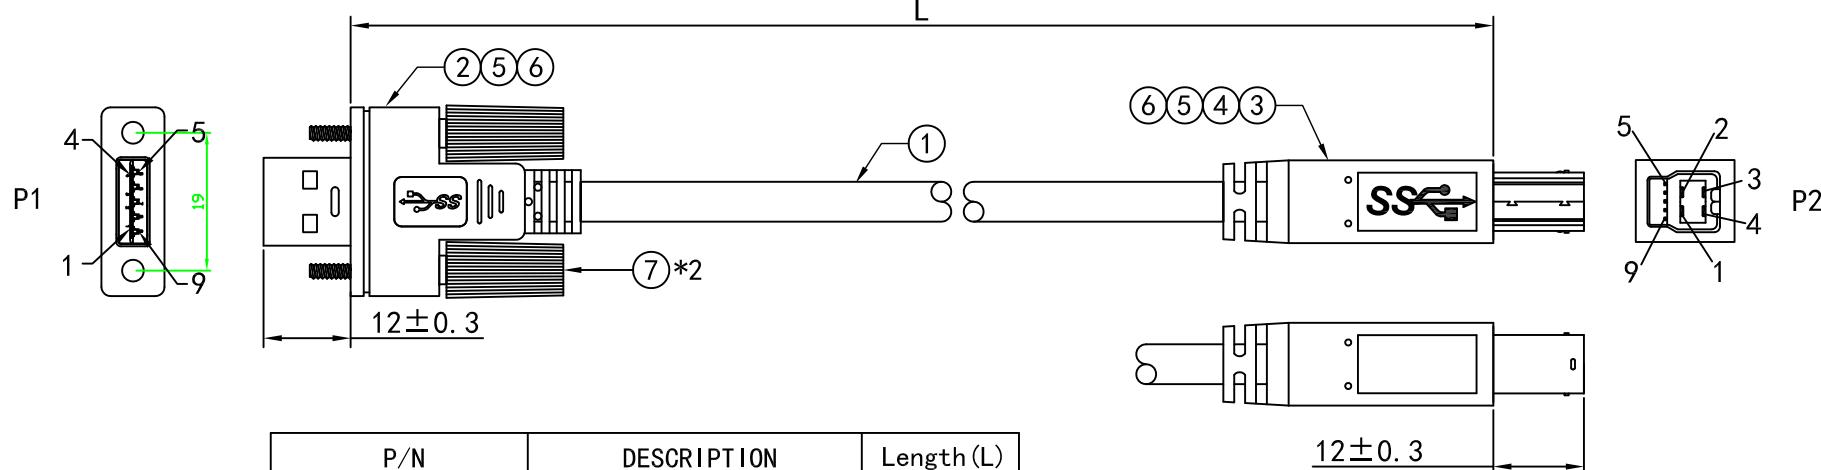

P/N	DESCRIPTION	Length (L)
USB3-SLAB-18IN	USB3.0 AM/BM-1.5FT	457 ± 10MM
USB3-SLAB-3FT	USB3.0 AM/BM-3FT	915 ± 20MM
USB3-SLAB-6FT	USB3.0 AM/BM-6FT	1830 ± 40MM
USB3-SLAB-10FT	USB3.0 AM/BM-10FT	3050 ± 50MM

NOTE:

1. 100% OPEN & SHORT WIRE TEST;
2. CONTACT RESISTANCE 2ohm Max;
3. INSULATION RESISTANCE 10M ohm Min;
4. HI-POT DC 300V/0.01S;

PIN OUT	
P1	P2
1 RED	1
2 WHITE	2
3 GREEN	3
4 BLACK	4
5 BLUE	5
6 YELLOW	6
7 DRAIN	7
8 PURPLE	8
9 ORANGE	9
SHELL	DRAIN+BRAID
	SHELL

7	SCREW	Black NICKEL-CU #4-40UNC (Low Lead-CU Below 1000ppm)	2PCS	
6	OUT-MOLD	PVC 45P BLACK	14G	
5	IN-MOLD	PE	6G	
4	COPPER	COPPER FOIL T:0.65*W:8*L:20MM	1PCS	
3	CONN 2	USB (3.0) B TYPE MALE BLUE PIN/GF NICKEL-SHELL	1SET	
2	CONN 1	USB (3.0) A TYPE MALE BLUE PIN/GF NICKEL-SHELL	1SET	
1	CABLE	UL20276 (USB3.0 Cable) (1P#28+DAM)*2C+1P#28+20#24+AL+D+B (16/6/0.12AL) OD:5.5MM BLACK PVC L:xxxxMM	1PCS	
NO.	MATERIAL. P/N	DESCRIPTION	Q' TY	VENDOR

	MODEL #:	USB3-SLAB-XIN/XFT
	PAGE:	1 / 1
DRAW:	NOTES:	USB 3.2 Gen 1 Screw-Locking Type-A to Type-B Cable
DATE:	SCALE:	1mm = 1mm
UNIT:	TOLERANCE:	+/- 0.15 mm
SITE:	CONTACT:	support@gearmo.com