


REV.

DESCRIPTION

DATE

RoHS

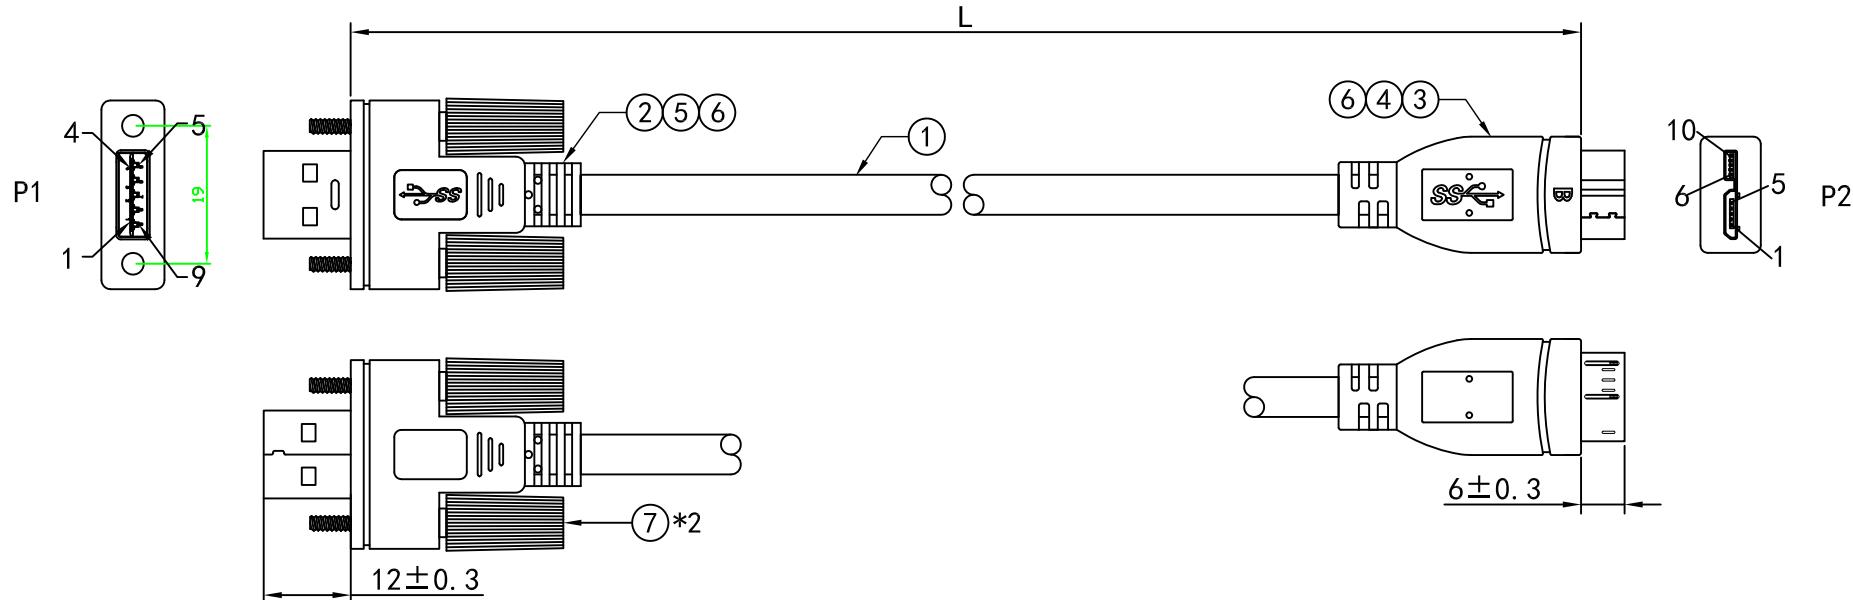

| P/N              | DESCRIPTION            | L           |
|------------------|------------------------|-------------|
| USB3-SLAMICB-3FT | USB3.0 AM/Micro BM-3FT | 915 ± 20MM  |
| USB3-SLAMICB-6FT | USB3.0 AM/Micro BM-6FT | 1830 ± 40MM |

## NOTE:

1. 100% OPEN & SHORT WIRE TEST;
2. CONTACT RESISTANCE 2ohm Max;
3. INSULATION RESISTANCE 10M ohm Min;
4. HI-POT DC 300V/0.01S;

| PIN   | OUT         |
|-------|-------------|
| P1    | P2          |
| 1     | RED         |
| 2     | WHITE       |
| 3     | GREEN       |
| 4     | BLACK       |
| 5     | BLUE        |
| 6     | YELLOW      |
| 7     | DRAIN       |
| 8     | PURPLE      |
| 9     | ORANGE      |
| 10    | DRAIN+BRAID |
| SHELL | SHELL       |

| NO. | MATERIAL. P/N | DESCRIPTION  | Q' TY | VENDOR |
|-----|---------------|--|-------|--------|
| 7   | SCREW         | Black NICKEL-CU #4-40UNC (Low Lead-CU Below 1000ppm)   | 2PCS  |        |
| 6   | OUT-MOLD      | PVC 45P BLACK  | 14G   |        |
| 5   | IN-MOLD       | PE   | 3G    |        |
| 4   | COPPER        | COPPER FOIL T:0.65*W:8*L:15MM  | 1PCS  |        |
| 3   | CONN 2        | USB (3.0) Micro BM TYPE MALE BLACK PIN/GF NICKEL-SHELL   | 1SET  |        |
| 2   | CONN 1        | USB (3.0) A TYPE MALE BLUE PIN/GF NICKEL-SHELL   | 1PCS  |        |
| 1   | CABLE         | UL20276 (USB3.0 Cable) (1P#28+DAM)*2C+1P#28+20#24+AL+D+B (16/6/0.12AM) OD:5.5MM BLACK PVC L:xxxxMM | 1PCS  |        |

|                 |              |                               |
|-----------------|--------------|-------------------------------|
| <b>CABLEMAX</b> | MODEL #:     | USB3-SLAMICB-XFT              |
|                 | PAGE:        | 1 / 1                         |
| NOTES:          | DRAW:        | Jesse W.                      |
|                 | DATE:        | 12/15/2025                    |
|                 | UNIT:        | mm                            |
|                 | SCALE:       | 1mm = 1mm                     |
| SITE:           | cablemax.com | CONTACT: cablemax.com/contact |