


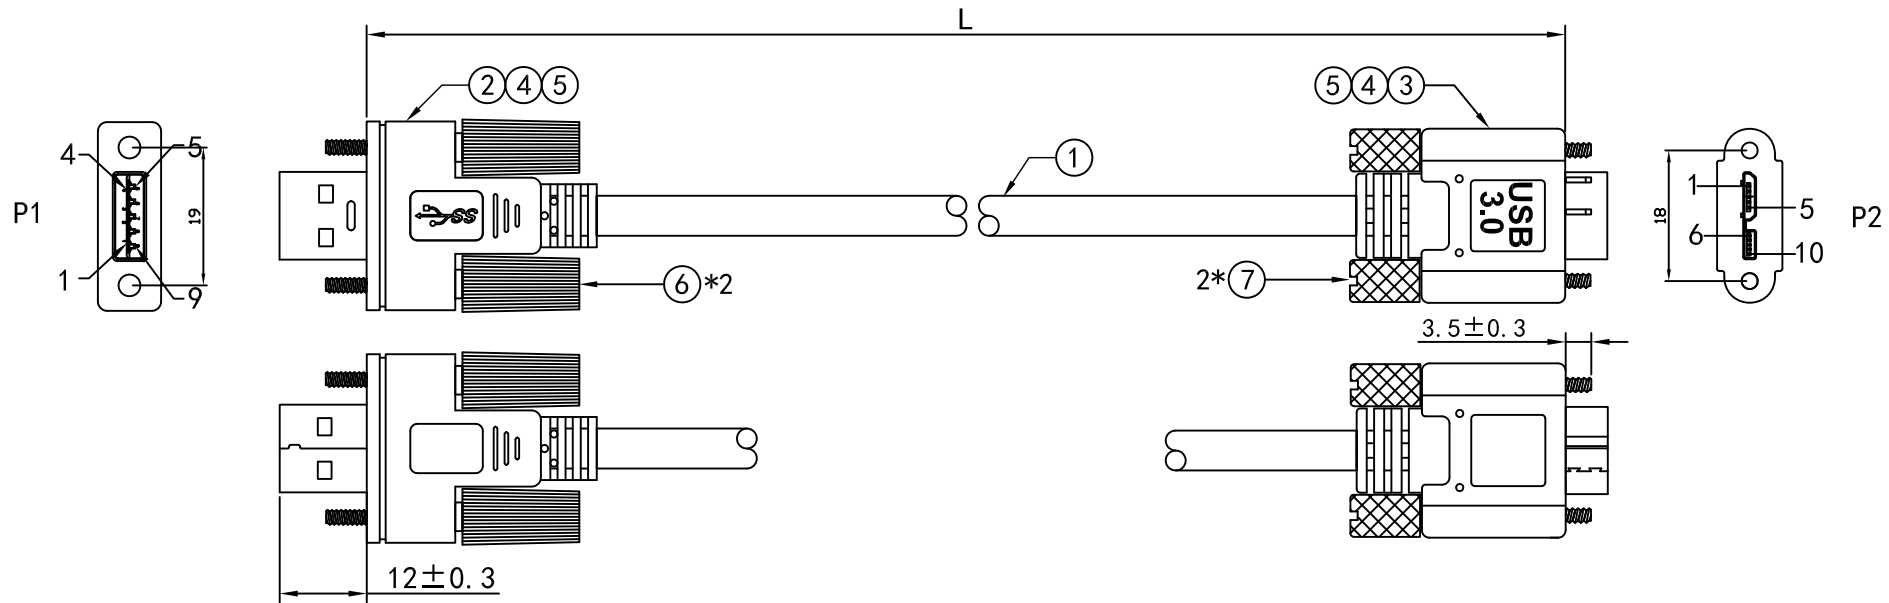

NOTE:

1. 100% OPEN & SHORT WIRE TEST;
2. CONTACT RESISTANCE 2ohm Max;
3. INSULATION RESISTANCE 10M ohm Min;
4. HI-POT DC 300V/0.01S;

	P/N	L
LKU30-AMBSSM-1M	USB3.0 AM/MICRO BM-1M	1000±30MM
LKU30-AMBSSM-2M	USB3.0 AM/MICRO BM-2M	2000±40MM
LKU30-AMBSSM-3M	USB3.0 AM/MICRO BM-3M	3000±50MM

PIN OUT		
P1		P2
1	RED	1
2	WHITE	2
3	GREEN	3
4	BLACK	5
5	BLUE	6
6	YELLOW	7
7	DRAIN	8
8	PURPLE	9
9	ORANGE	10
SHELL	DRAIN+BRAID	SHELL

7	SCREW 2	NICKEL-SHELL OD:5.7*L:33.1MM M2	2PCS			MODEL #:	USB3-SLASLMICB
6	SCREW 1	Black NICKEL-CU #4-40UNC(Low lead-CU Below 1000ppm)	2PCS			PAGE:	1 / 1
5	OUT-MOLD	PVC 45P BLACK	18G			NOTES:	USB 3.2 Gen 1 USB Type-A Screw-Locking to USB Micro-B Screw-Locking Cable
4	IN-MOLD	PE	3G				
3	CONN 2	USB(3.0)Micro B TYPE MALE BLUE PIN/GF NICKEL-SHELL	1SET				
2	CONN 1	USB(3.0) A TYPE MALE BLUE PIN/GF NICKEL-SHELL	1SET		DRAW:	Jesse Woodward	
					DATE:	09/14/2026	
1	CABLE	UL20276(USB3.0 Cable) (1P#28+DAM)*2C+1P#28+2C#24+AL+D+B(16/6/0.12AL) OD:5.5MM BLACK PVC L:xxxxMM	1PCS		UNIT:	mm	
NO.	MATERIAL. P/N	DESCRIPTION	Q'TY	VENDOR	SITE:	coolgear.com	CONTACT: support@coolgear.com