


REV.

DESCRIPTION

DATE

RoHS

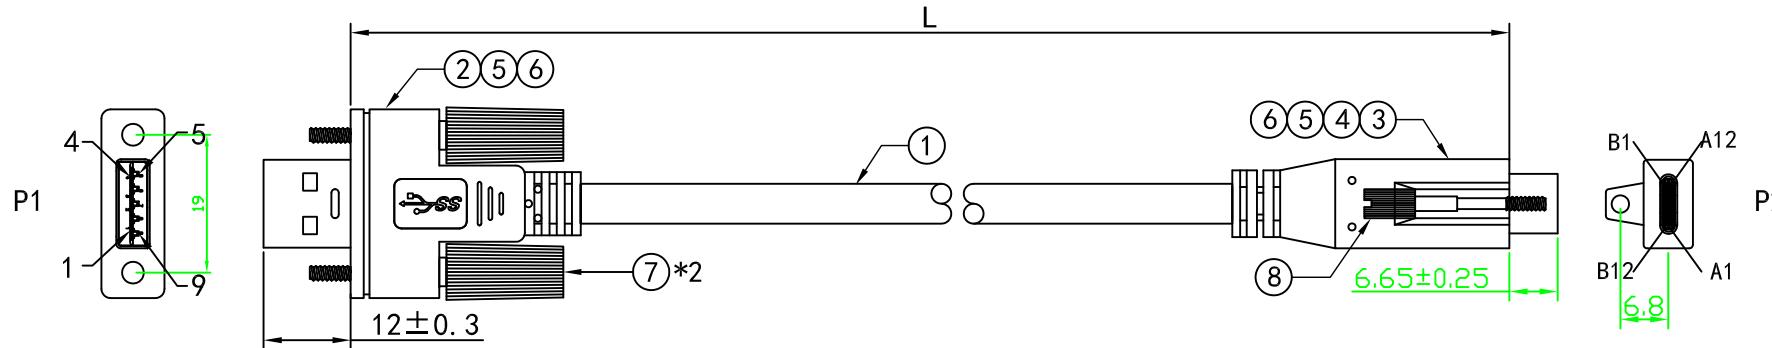


| | P/N | L |
|------------------|----------------------|-------------|
| USB3-SLASSLC-3FT | USB3.0 AM/TYPE C-3FT | 915 ± 20MM |
| USB3-SLASSLC6FT | USB3.0 AM/TYPE C-6FT | 1830 ± 40MM |

NOTE:

1. 100% OPEN & SHORT WIRE TEST;
2. CONTACT RESISTANCE 2ohm Max;
3. INSULATION RESISTANCE 10M ohm Min;
4. HI-POT DC 300V/0.01S;

| | | | | |
|-----|---------------|--|-------|--------|
| 8 | SCREW | SCREW M2 OD:4.0*L:24.5MM NICKEL-SHELL | 1PCS | |
| 7 | SCREW | Black NICKEL-CU #4-40UNC (Low Lead-CU Below 1000ppm) | 2PCS | |
| 6 | OUT-MOLD | PVC 45P BLACK | 18G | |
| 5 | IN-MOLD | PE | 3G | |
| 4 | TINPLATE | TINPLATE FOR TYPE C OD:6.0MM | 1PCS | |
| 3 | CONN 2 | TYEP C-3.1 MALE (PCB+56KΩ) BLACK PIN/GF NICKEL-SHELL | 1PCS | |
| 2 | CONN 1 | USB(3.0) A TYPE MALE BLUE PIN/GF NICKEL-SHELL | 1SET | |
| 1 | CABLE | UL2725 (USB3.0 Cable) (1P#30+DAM)*2C+1P#30+2C#24+AL+D+B(16/6/0.12AL) OD:4.5MM BLACK PVC L:xxxxMM | 1PCS | |
| NO. | MATERIAL. P/N | DESCRIPTION | Q' TY | VENDOR |

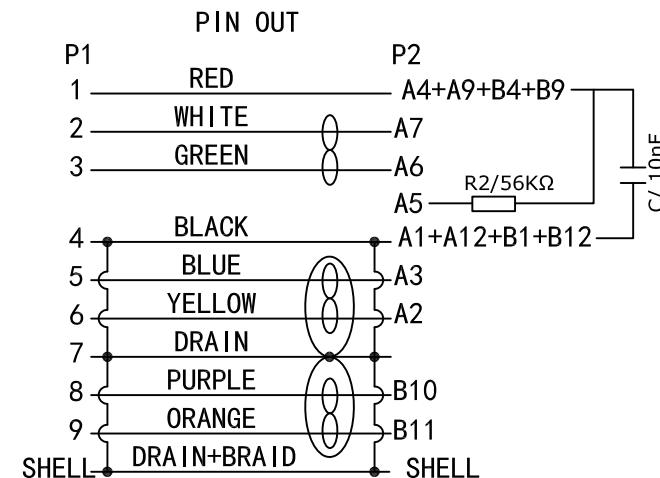

| | | |
|------------------|--------------|-------------------------------|
| CABLE MAX | MODEL #: | USB3-SLASSLC-XFT |
| | PAGE: | 1 / 1 |
| DRAW: | Jesse W. | |
| DATE: | 12/15/2025 | |
| UNIT: | mm | SCALE: 1mm = 1mm |
| SITE: | cablemax.com | CONTACT: cablemax.com/contact |