


REV.	DESCRIPTION	DATE
△		
△		

RoHS

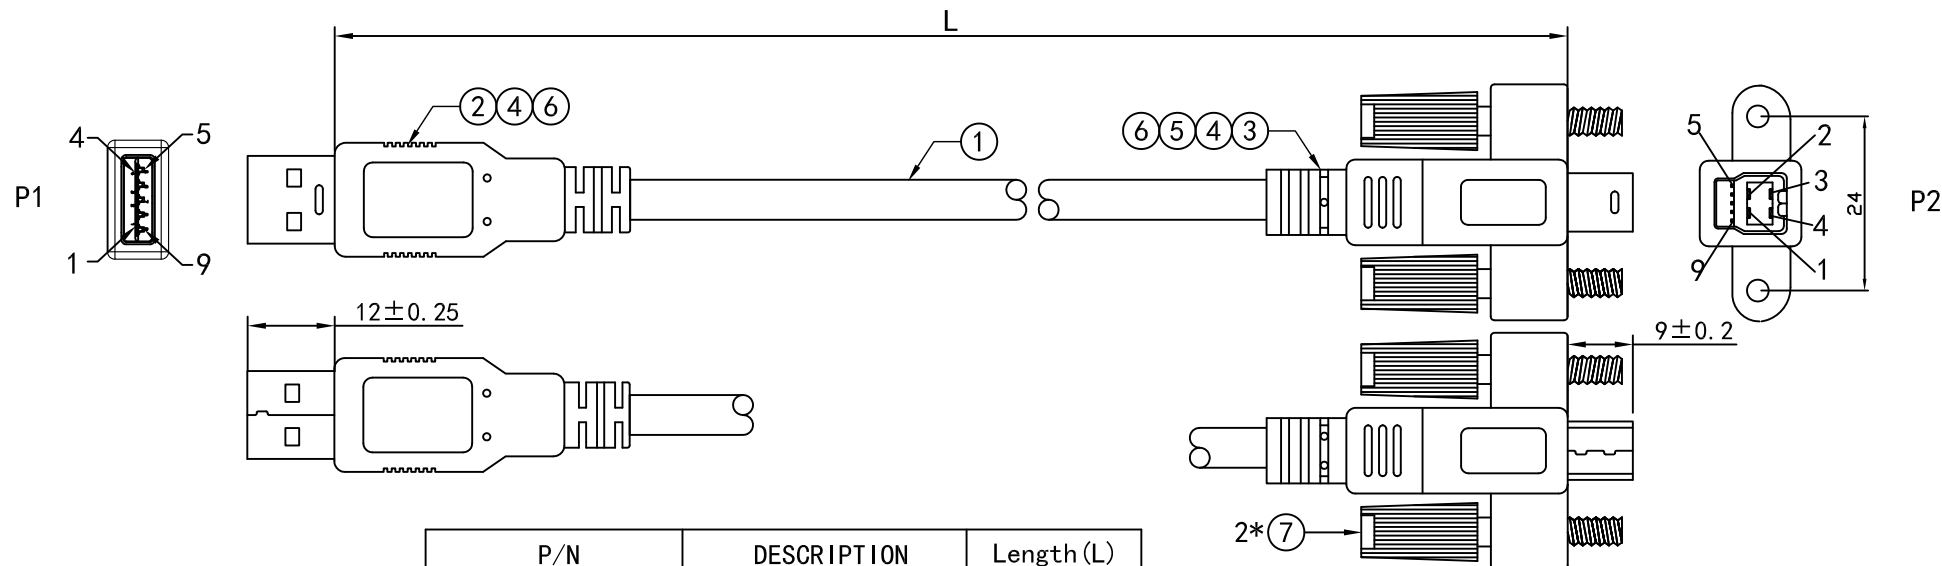

NOTE:

1. 100% OPEN & SHORT WIRE TEST;
2. CONTACT RESISTANCE 2ohm Max;
3. INSULATION RESISTANCE 10M ohm Min;
4. HI-POT DC 300V/0. 01S;

P1	PIN	OUT	P2
1	RED		1
2	WHITE		2
3	GREEN		3
4	BLACK		4
5	BLUE		5
6	YELLOW		6
7	DRAIN		7
8	PURPLE		8
9	ORANGE		9
SHELL	DRAIN+BRAID		SHELL

7	SCREW	Black NICKEL-CU #4-40UNC (Low lead-CU Below 1000ppm)	2PCS	
6	OUT-MOLD	PVC 45P BLACK	14G	
5	IN-MOLD	PE	6G	
4	COPPER	COPPER FOIL T:0. 65*W:8*L:20MM	2PCS	
3	CONN 2	USB (3. 0) B TYPE MALE BLUE PIN/GF NICKEL-SHELL	1SET	
2	CONN 1	USB (3. 0) A TYPE MALE BLUE PIN/GF NICKEL-SHELL	1SET	
1	CABLE	UL20276 (USB3. 0 Cable) (1P#28+DAM)*2C+1P#28+2C#24+AL+D+B (16/6/0. 12AL) OD:5. 5MM BLACK PVC L:xxxxMM	1PCS	
NO.	MATERIAL. P/N	DESCRIPTION	Q' TY	VENDOR

coolgear

DRAW: Jesse Woodward

DATE: 01/15/2026

UNIT: mm

SITE: coolgear.com

PAGE:

1 / 1

NOTES:

USB 3.2 Gen 1 Type-B
Screw-Lock to Type-A
Cable

SCALE:

1mm = 1mm

CONTACT: support@coolgear.com