


REV.

## DESCRIPTION

DATE


RoHS

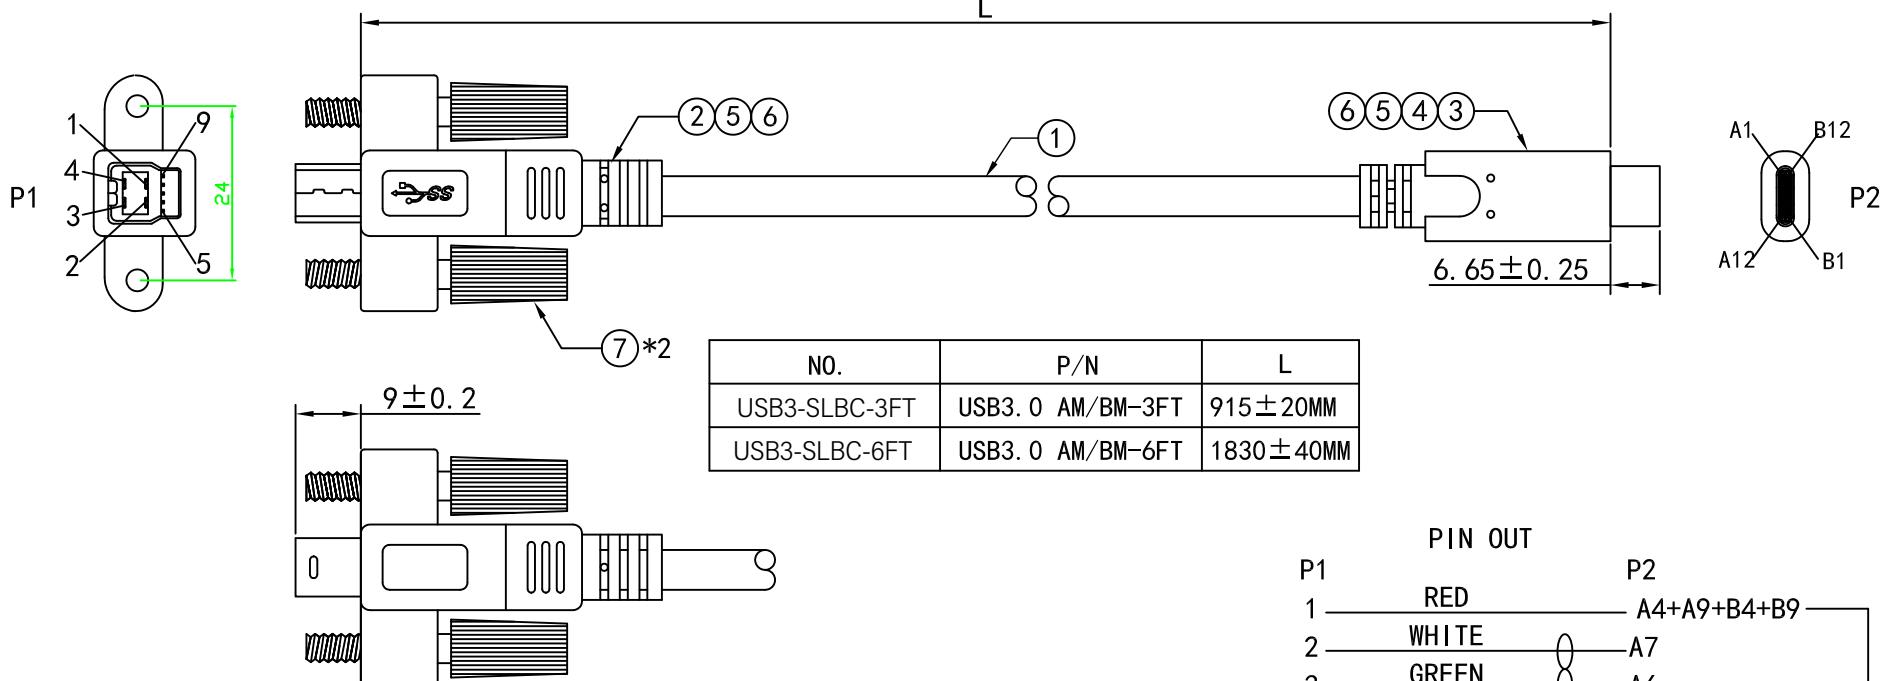

## NOTE:

1. 100% OPEN & SHORT WIRE TEST;
2. CONTACT RESISTANCE 2ohm Max;
3. INSULATION RESISTANCE 10M ohm Min;
4. HI-POT DC 300V/0.01S;

|     |               |   |       |        |
|-----|---------------|---|-------|--------|
| 7   | SCREW         | Black NICKEL-CU #4-40UNC (Low Lead-CU Below 1000ppm)  | 2PCS  |        |
| 6   | OUT-MOLD      | PVC 45P BLACK   | 14G   |        |
| 5   | IN-MOLD       | PE  | 6G    |        |
| 4   | TINPLATE      | TINPLATE FOR TYPE C OD:6.0MM  | 1PCS  |        |
| 3   | CONN 2        | TYPE C-3.1 MALE (PCB+5.1KΩ) BLACK PIN/GF NICKEL-SHELL   | 1PCS  |        |
| 2   | CONN 1        | USB(3.0) B TYPE MALE BLUE PIN/GF NICKEL-SHELL   | 1SET  |        |
| 1   | CABLE         | UL2725 (USB3.0 Cable) (1P#30+DAM)*2C+1P#30+2C#24+AL+D+B(16/6/0.12AL) OD:4.5MM BLACK PVC L:xxxx MM | 1PCS  |        |
| NO. | MATERIAL. P/N | DESCRIPTION   | Q' TY | VENDOR |

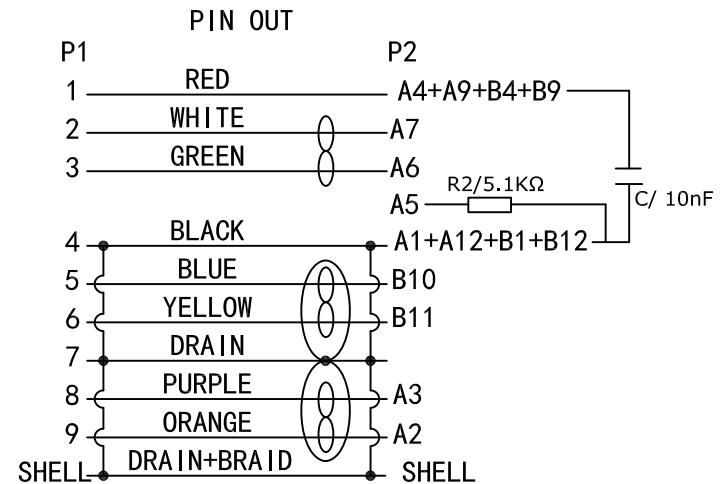

|                  |              |                               |
|------------------|--------------|-------------------------------|
| <b>CABLE MAX</b> | MODEL #:     | USB3-SLBC-XFT                 |
|                  | PAGE:        | 1 / 1                         |
| DRAW:            | Jesse W.     |                               |
| DATE:            | 12/15/2025   |                               |
| UNIT:            | mm           | SCALE: 1mm = 1mm              |
| SITE:            | cablemax.com | CONTACT: cablemax.com/contact |