



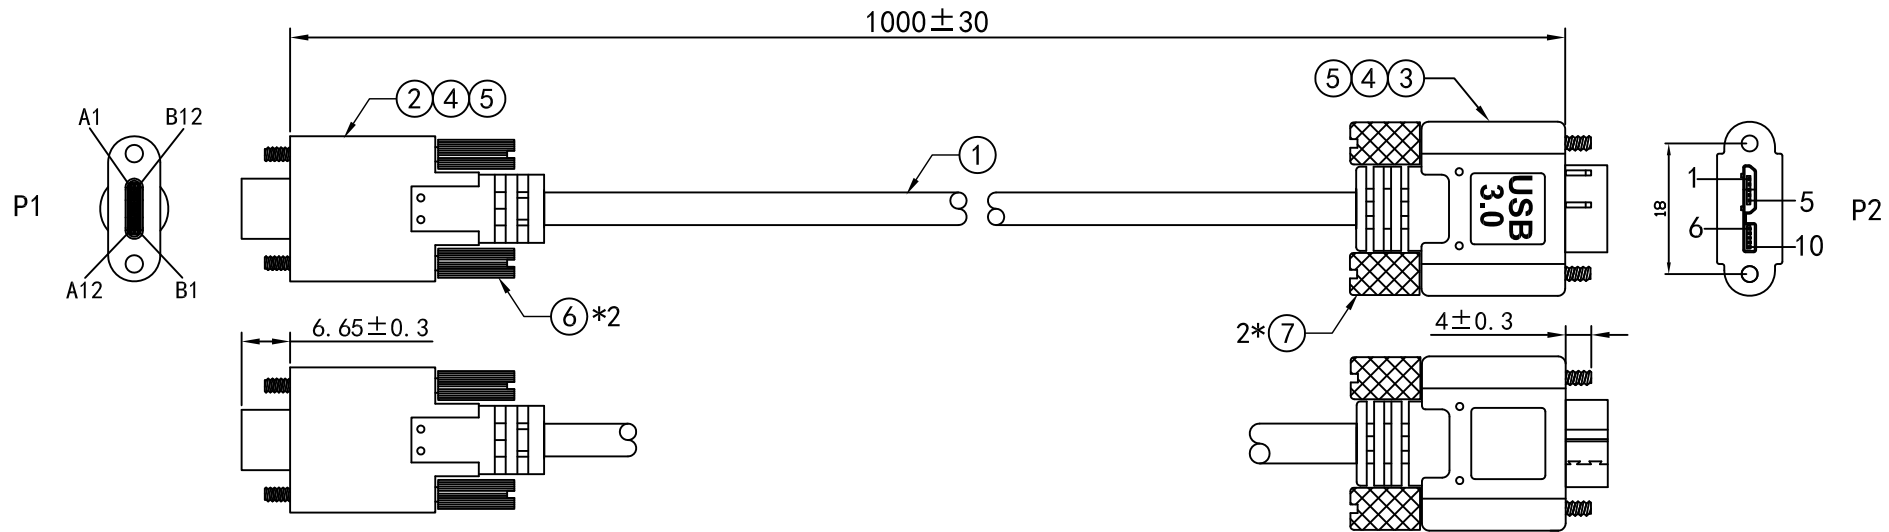

NOTE:

1. 100% OPEN & SHORT WIRE TEST;
2. CONTACT RESISTANCE 2ohm Max;
3. INSULATION RESISTANCE 10M ohm Min;
4. HI-POT DC 300V/0.01S;

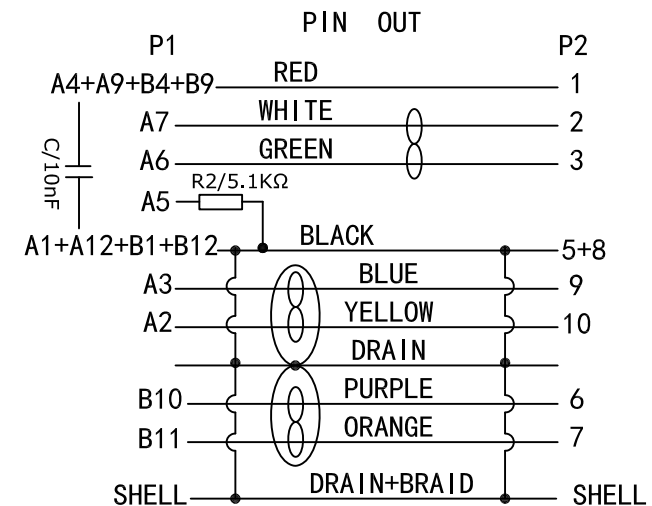

7	SCREW 2	NICKEL-SHELL OD:5.7*L:33.1MM M2 SCREW	2PCS	
6	SCREW 1	NICKEL-SHELL OD:4.0*L:33.5MM M2 SCREW	2PCS	
5	OUT-MOLD	PVC 45P BLACK	18G	
4	IN-MOLD	PE	3G	
3	CONN 2	USB3.0 Micro B TYPE MALE BLUE PIN/GF NICKEL-SHELL	1SET	
2	CONN 1	TYPE C-3.0 MALE BLACK PIN/GF NICKEL-SHELL	1SET	
1	CABLE	UL2725(USB3.0 Cable) (1P#30+DAM)*2C+1P#30+2C#24+AL+D+B(16/6/0.12AL) OD:4.5MM BLACK PVC L:xxxxMM	1PCS	PAK HENG
NO.	MATERIAL. P/N	DESCRIPTION	Q'TY	VENDOR

coolgear

DRAW: Jesse Woodward

DATE: 09/14/2026

UNIT: mm

SITE: coolgear.com

MODEL #:

USB3-SLCSLMICB

PAGE:

1 / 1

NOTES:

USB 3.2 Gen 1 USB Type-C
Screw-Locking to USB
Micro-B Screw-Locking
Cable

CONTACT: support@coolgear.com