




All materials compliant with RoHS, REACH standards

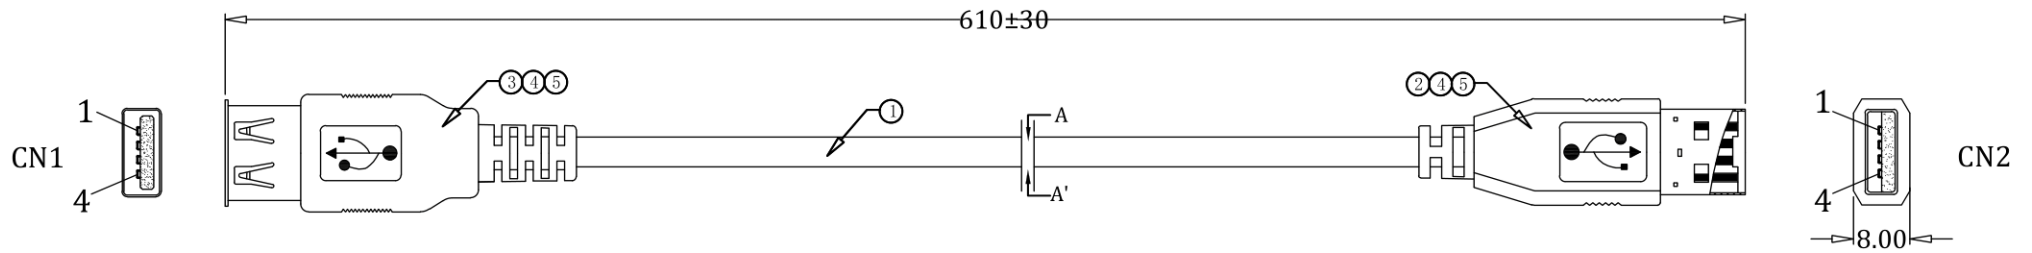

Pin Out:

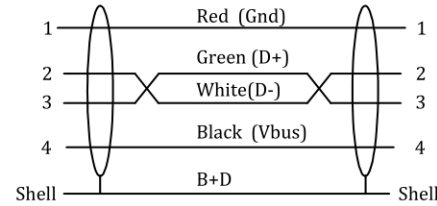

SEC:A--A'

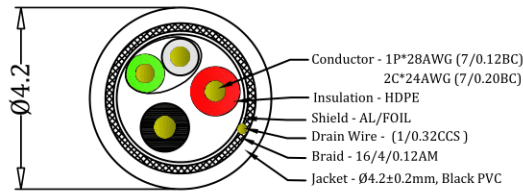

Electronic Tests:

- A. Open/Short/Intermittence: 100%
- B. Hi-Pot: AC 150V 0.01S 2mA
- C. Insulation Resistance: DC 300V 0.01S 10MΩ min
- D. Conductor Resistance: 3Ω max



5	Outer Mold	45P PVC, Black	15	G
4	Inner Mold	LDPE	3	G
3	Connector	USB 2.0 A Female Pin Gold-plated,shell Ni-plated	1	PCS
2	Connector	USB 2.0 A Male Pin Gold-plated,shell Ni-plated	1	PCS
1	Cable	USB2.0 28#(7/0.12BC)*2C+24#(7/0.20BC)*2C+AL+D(1/0.32CCS)+B(64/0.12AM) OD:4.2±0.2mm PVC Jacket Black	***	M
NO.	NAME	SPECIFICATIONS	Q'TY	UNIT

 THIRD ANGLE PROJECTION -TOLERANCES- LENGTH: X±0.3 .X±0.2 .XX±0.1 ANGLE: X°±2° .X°±1° .XX°±0.5°	Model No.	USBG-06AAB		
	Drawing No.	USBG-06AAB		
	Product Description	USB2.0 A/M-A/F Cable		
	Units:mm	Approved:		
	Page: 1 of 1	Check:		
	Design:			