
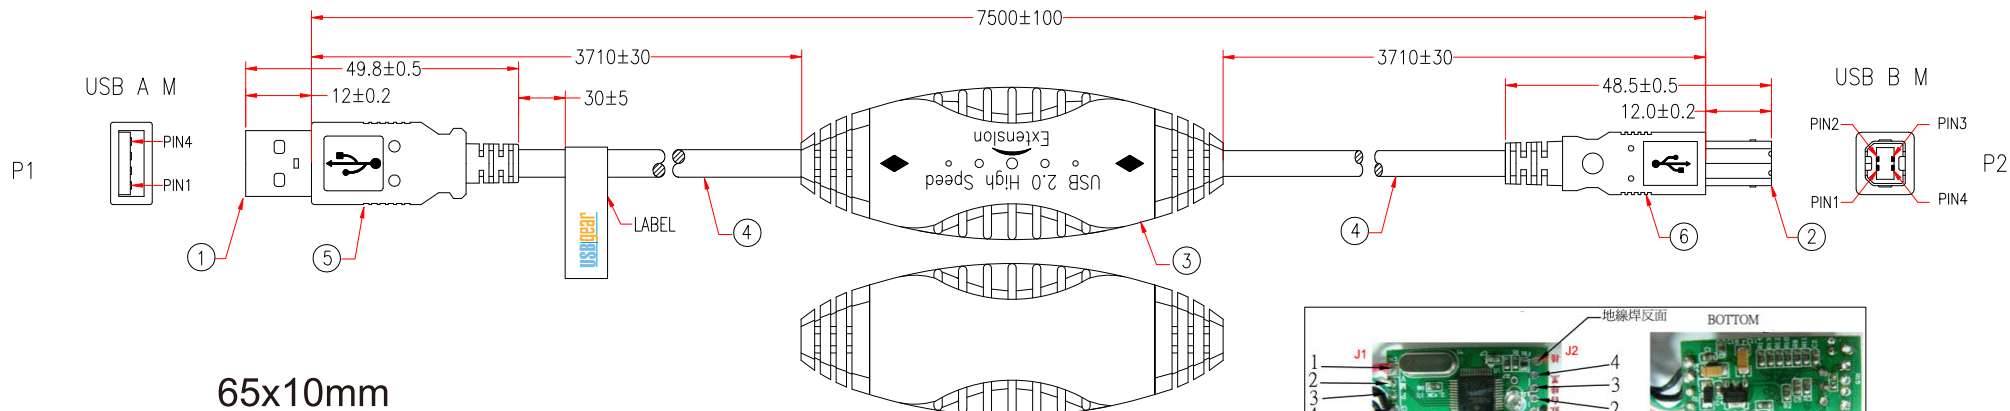


P1: M-942H

P2: M-945A

P3: M-SR376A

Customer No:

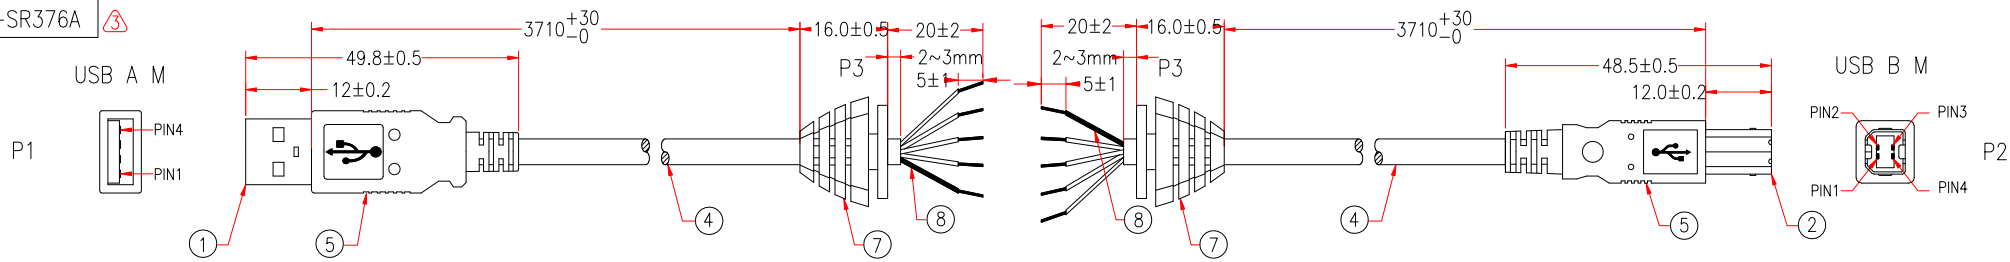


65x10mm



- Pantone 542C
- Pantone 7408C



PACKING:



NOTE: All relevant materials are complied with RoHS directive .

8	BLACK HEAT SHRINK TUBE $\phi$ 0.8*12mm	A4HA08-0959	2	M959
7	MOLDED PVC TRANSPARENT BLACK (T519)	H1BK01-0304T10		M304
6	MOLDED PVC TRANSPARENT BLACK (T519)	H1BK01-0304T10		M304
5	MOLDED PVC TRANSPARENT BLACK (T519)	H1BK01-0304T10	1	M304
4	USB CABLE 2.0, UL STYLE 1 TWISDED PAIR 28AWG AND 2C 20AWG, OD 5.0mm, JACKET TRANSPARENT BLACK (T519), DRAWING NO. EUAB2801P2002C-018	H5KH01-0304T10	3760mm*2	M304
3	PCB:BAPS-BAPS-UR502ACTR	A8Q0042-0000	1SET	
	ASSEMBLY TRANSPARENT BLACK HOOD	A8Q0043-0000	1SET	
2	USB B MALE 2.0, GOLD PLATING 30U" ON CONTACTS, WHITE INSULATOR, SHORT TYPE	A1HB26-0108	1SET	M108
1	USB A MALE 2.0, GOLD PLATING 30U" ON CONTACTS, WHITE INSULATOR, SHORT TYPE	A1HA28-0108	1SET	M108

No.	DESCRIPTION	Q'TY	Supplier
APPROVED			
CHECKED	HU		
DRAWING	JIANG		



Cable Length Unless Other Spec. Tolerances:

0 ~200mm	±10mm
201~1000mm	±20mm
1001 ~1500mm	±25mm
1501~2100mm	±30mm
2100mm↑	±40mm

P1	P3(J1)	P2	P3(J2)
1	1 RED 20#	1	1 RED 20#
2	2 WHITE	2	2 WHITE
3	3 GREEN	3	3 GREEN
4	4 BLACK 20#	4	4 BLACK 20#
SHIELD	5 BRAID+DRAIN	SHIELD	5 BRAID+DRAIN

REV.3 2019.11.20

MODIFY P3 MODEL NAME FOR M-SR280C TO M-SR376A

REV.1 2017.01.03

MODIFY PLUG NAME

REV.2 2017.03.08

MODIFY PACKING

CHECKED

DATE

20/NOV/19

ITEM NO.

USBG-25FTAB

UNIT:mm

