





Dual USB Charging Board Type-A 15 Watts x 2 | Type-C PD 30 Watts x 2 60 Watts Total – PCBA



Model No. CG-CCJPDAC60

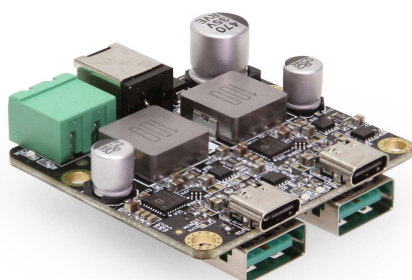

The ChargeIT! Dual Port Charger provides an effective amount of Charging power ideal for Tablets, Cell phones, and laptops. The USB PD charger board incorporates both Standard Type-A and USB PD Type-C charging ports. The wide DC input voltage range is ideal for 12V DC and 24V DC Vehicle applications.

- **DC Input Voltage:** 10~28V
- **Output Voltage:** 3~12V, Adjustable
- **Power Connector:** 2-Pin Terminal Block
- Provides two USB-C PD 30 Watt PD 3.0 PPS ports or two USB-A 15 Watt ports
- Multi-protection for high reliability including ESD, over-voltage, reverse polarity installation, and over-temperature protection.

Interested? LEARN MORE →



Questions? Speak to an engineering expert today!

Our on site engineers are ready to help you with your build.

☎ **1-727-209-1300** (Local) ✉ **expert@coolgear.com**



We Speak Your Speak - When you reach out to our support, you'll find yourself in the hands of a solution-oriented, knowledgeable expert ready to answer whatever question you throw at them. Go ahead, test us.

We're Ready For Integration, Every Time. - Coolgear streamlines the task of selecting charging and connectivity products. For over 20 years our rugged, off-the-shelf USB hubs and serial products are ready to go for your next project.

Within every great machine, lives Coolgear. - At Coolgear, we're just as passionate about building great products as you are. That's why we aim to meet or exceed your build specs every time.,

Advanced Engineering - Coolgear painstakingly sources high-quality components, oversees all manufacturing methods, and conducts rigorous testing to ensure all our products are industrial-grade. This means greater duty cycle, zero data loss, and longer lasting builds. We promise.,

PRODUCT SPECIFICATIONS

Looking for product documentation?

[View CAD Models, Data sheet and Drawings here >](#)



Performance	ESD Protection	4KV Surge Protection
	Over Current Protection	Y
	Over Voltage Protection	Y
Hardware	Charging Protocols	Apple 2.4A, Dedicated Charging Port (DCP), Samsung
Product Information	Warranty	1 year from date of purchase
	Input Voltage	+12~24V DC
Power	Over Current Protection	Y
	Over Voltage Protection	Y
PD Profile Support	Voltage Profiles	5V/2.4A, 9V/3A, 12V/2.25A
Compliance	Country of Origin	China
Other Data	UPC	045079163386
	Weight	0.037 lbs
	Dimensions	2.75 × 2.00 × 0.50 in

Ready to Buy? Let's get to work!

[Purchase order](#) lets set you up.

[Online with Credit card](#) Orders shipped same day!

*orders placed prior to 3:30pm EST

 [1-888-688-2188 \(Toll free\)](tel:1-888-688-2188)

 sales@coolgear.com